

FXLuminaire®

LIGHTING CATALOG

LANDSCAPE LIGHTING



➔ INTERACTIVE
TABLE OF CONTENTS

FINISHES

LUXOR ZDC

LUXOR CONTROLLERS

ZD MR-16 LAMPS

LUXOR CUBE

POWER CONTROLLERS

INTEGRATED LED

- ACCENT LIGHTS
- PATH & AREA LIGHTS
- WALL LIGHTS
- DOWN LIGHTS
- IN-GRADE/WELL/
SPECIALTY LIGHTS

STANDARD BASES

- ACCENT LIGHTS
- PATH & AREA LIGHTS
- WALL LIGHTS
- DOWN LIGHTS
- IN-GRADE/WELL LIGHTS

ACCESSORIES

WARRANTY



INTERACTIVE
TABLE OF CONTENTS

FINISHES

LUXOR ZDC

LUXOR CONTROLLERS

ZD MR-16 LAMPS

LUXOR CUBE

POWER CONTROLLERS

INTEGRATED LED

- ACCENT LIGHTS
- PATH & AREA LIGHTS
- WALL LIGHTS
- DOWN LIGHTS
- IN-GRADE/WELL/
SPECIALTY LIGHTS

STANDARD BASES

- ACCENT LIGHTS
- PATH & AREA LIGHTS
- WALL LIGHTS
- DOWN LIGHTS
- IN-GRADE/WELL LIGHTS

ACCESSORIES

WARRANTY

LIGHT UP THE NIGHT WITH LED *color filters*

Most standard and ZD LED fixtures include three color filters and a frosted lens, enabling customization of the color temperature and beam spread before or after installation. More options make it easy to accent the highlights of any landscape. Magnify the beauty of

green leaves at the start of summer with a green filter; boost the warmth of autumn colors come fall; or showcase the stark beauty of bare bark during winter with a blue filter to create drama and allure in an otherwise dormant landscape.

Color filtration

The chrome reflector is the basis for all stacking filters



From the top

Add and remove filters by interlocking them with a quarter turn



Seamless integration

Frosted filters or beam angle lenses soften and diffuse color filters or LED glare



FILTER COLOR TEMPERATURES CCT (K)






| | | | |
|--------------|------------|------------|-----------|
| Frosted 3900 | Amber 2700 | Green 4500 | Blue 5200 |
|--------------|------------|------------|-----------|

FX LUMINAIRE FINISHES





Metals

| | | | | | | | |
|---|---|--|---|---|---|---|---|
|  |  |  |  |  |  |  |  |
| AB on copper Antique Bronze | AB on brass Antique Bronze | AT on copper Antique Tumbled | AT on brass Antique Tumbled | CU Copper | NP Nickel Plate | BS Natural Brass | SS Stainless Steel |



Powder Coat – Standard

| | | | | | |
|---|---|--|---|---|---|
|  |  |  |  |  |  |
| BZ Bronze Metallic | DG Desert Granite | WI Weathered Iron | SB Sedona Brown | FB Flat Black | M Matte Gray (Luxor and LX only) |

Powder Coat – Specialty

| | | | |
|---|---|--|---|
|  |  |  |  |
| WG White Gloss | FW Flat White | AL Almond | SV Silver |

Composites

| | |
|---|---|
|  |  |
| CB Camo Bronze | DT Desert Tan |

➔ INTERACTIVE
TABLE OF CONTENTS

FINISHES

LUXOR ZDC

LUXOR CONTROLLERS

ZD MR-16 LAMPS

LUXOR CUBE

POWER CONTROLLERS

INTEGRATED LED

- ACCENT LIGHTS
- PATH & AREA LIGHTS
- WALL LIGHTS
- DOWN LIGHTS
- IN-GRADE/WELL/
SPECIALTY LIGHTS

STANDARD BASES

- ACCENT LIGHTS
- PATH & AREA LIGHTS
- WALL LIGHTS
- DOWN LIGHTS
- IN-GRADE/WELL LIGHTS

ACCESSORIES

WARRANTY

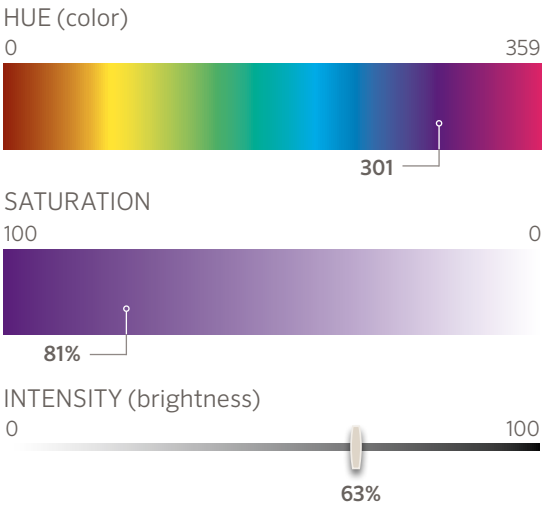
LUXOR® ZDC

Zoning and Dimming + Color

The Luxor ZDC provides the ability to create 30,000 colors using RGBW LED technology. With the ZDC, custom colors can be created for outdoor holiday displays, team spirit themes, company colors, or special events. Color temperatures can be adjusted to match vegetation and architecture, offering unique landscape looks throughout the year.



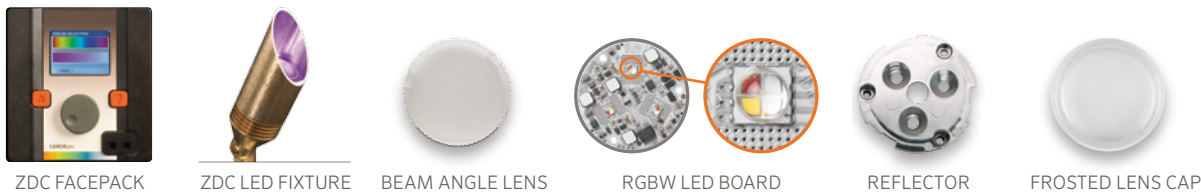
ZDC facepack allows easy creation of custom colors



Using the color bars, simply select the desired hue (color), saturation level and intensity (brightness) for any light or group of lights in the Luxor ZDC system. You can save custom colors for easy access.

HOW TO CONVERT A ZD INTO A ZDC

Any Luxor ZD can be upgraded to a ZDC quickly and easily. Simply replace the existing facepack with a new ZDC facepack. Then, change out the components of each fixture with a new RGBW LED board, ZDC reflector, and new frosted lens. The ZDC is currently compatible only with fixtures that have 3LED, 6LED, or 9LED capability.



➔ INTERACTIVE
TABLE OF CONTENTS

FINISHES

LUXOR ZDC

LUXOR CONTROLLERS

ZD MR-16 LAMPS

LUXOR CUBE

POWER CONTROLLERS

INTEGRATED LED

- ACCENT LIGHTS
- PATH & AREA LIGHTS
- WALL LIGHTS
- DOWN LIGHTS
- IN-GRADE/WELL/
SPECIALTY LIGHTS

STANDARD BASES

- ACCENT LIGHTS
- PATH & AREA LIGHTS
- WALL LIGHTS
- DOWN LIGHTS
- IN-GRADE/WELL LIGHTS

ACCESSORIES

WARRANTY



LUXOR[®] ZDC
A Spectrum of 30,000 Possibilities



| ▲ GREEN | |
|------------|-----|
| HUE | 143 |
| SATURATION | 96% |
| INTENSITY | 59% |



| ▲ PURPLE | |
|------------|-----|
| HUE | 301 |
| SATURATION | 81% |
| INTENSITY | 63% |



| ▲ AMBER | |
|------------|-----|
| HUE | 43 |
| SATURATION | 38% |
| INTENSITY | 31% |

INTERACTIVE
TABLE OF CONTENTS

FINISHES

LUXOR ZDC

LUXOR CONTROLLERS

ZD MR-16 LAMPS

LUXOR CUBE

POWER CONTROLLERS

INTEGRATED LED

- ACCENT LIGHTS
- PATH & AREA LIGHTS
- WALL LIGHTS
- DOWN LIGHTS
- IN-GRADE/WELL/
SPECIALTY LIGHTS

STANDARD BASES

- ACCENT LIGHTS
- PATH & AREA LIGHTS
- WALL LIGHTS
- DOWN LIGHTS
- IN-GRADE/WELL LIGHTS

ACCESSORIES

WARRANTY

ZDC COMPATIBLE LED FIXTURES*

Long Shield




Long Shield



Long Shield









▲ **VS** See page 13

▲ **CC** See page 13

▲ **NP** See page 14


▲ **FB** See page 14


▲ **LC** See page 16


▲ **PB** See page 16













▲ **CA** See page 19

▲ **CB** See page 19

▲ **CV** See page 19

▲ **DM** See page 19

▲ **JS** See page 19


▲ **QF** See page 19














▲ **PL** See page 20

▲ **TM** See page 20

▲ **FG** See page 21

▲ **TD** See page 21

▲ **PM** See page 22

▲ **RW** See page 22





Optional Cover



Optional Sleeve







Optional Sleeves

▲ **MO** See page 27

▲ **NL** See page 29

▲ **PS** See page 29

▲ **DE** See page 30

▲ **JB** See page 30

▲ **VE** See page 31





Ring (RG)

Cowling (CW)





▲ **KG** See page 33

▲ **PE** See page 33

▲ **FC** See page 34

▲ **LL** See page 34

 ZDC capable fixture. Look for the FX color spectrum symbol throughout this catalog to easily identify all ZDC-compatible fixtures.

FINISHES

LUXOR ZDC

LUXOR CONTROLLERS

ZD MR-16 LAMPS

LUXOR CUBE

POWER CONTROLLERS

INTEGRATED LED

ACCENT LIGHTS

PATH & AREA LIGHTS

WALL LIGHTS

DOWN LIGHTS

IN-GRADE/WELL/
SPECIALTY LIGHTS

STANDARD BASES

ACCENT LIGHTS

PATH & AREA LIGHTS

WALL LIGHTS

DOWN LIGHTS

IN-GRADE/WELL LIGHTS

ACCESSORIES

WARRANTY

Luxor® Lighting Controllers

GROUP 3

GROUP 2

GROUP 1

DESIGNED
TO PERFORM

Choose from a wide array of control options: the Luxor® ZDC with zoning and dimming plus color, the robust ZD with zoning and dimming, the LX digital transformer, or the PX multi-tap transformer.

FINISHES

LUXOR ZDC

LUXOR CONTROLLERS

ZD MR-16 LAMPS

LUXOR CUBE

POWER CONTROLLERS

INTEGRATED LED

- ACCENT LIGHTS
- PATH & AREA LIGHTS
- WALL LIGHTS
- DOWN LIGHTS
- IN-GRADE/WELL/
SPECIALTY LIGHTS

STANDARD BASES

- ACCENT LIGHTS
- PATH & AREA LIGHTS
- WALL LIGHTS
- DOWN LIGHTS
- IN-GRADE/WELL LIGHTS

ACCESSORIES

WARRANTY

Luxor® ZD and ZDC Features

With complete Zoning and Dimming capabilities, optional Wi-Fi control, and now color creation, the Luxor lighting control system offers unsurpassed freedom and flexibility.

Main Features

- Up to 250 independently adjustable lighting groups can be created
- Compatible with an FX LED fixture or device with FX zoning, dimming, or color capabilities only
- All groups can be turned on independently and dimmed from 1-100%
- User interface includes a full color LCD display for easy setup, maintenance and adjusting of groups
- Uses event-based scheduling, which allows a single group of lights to change dimming percentages throughout the night
- Optional iOS or Android control with the Wi-Fi module accessory (sold separately)
- Wirelessly assign fixtures to groups with the LAM accessory* (sold separately)

Detail Features

- Simple two-wire configuration for easy installation and adjusting
- No matter where a light is within a system, it can communicate with the transformer to receive its schedule, dimming percentage, and group
- Astronomical Timing Function with Map Placement

ZDC Features

- All of the features of the Luxor ZD plus:
- Offers 30,000 different color choices for unmatched ability to customize landscape lighting for any occasion, season, or mood
 - Create a personalized color palette of 250 user-saved options

International

- 230V input power; power cord with country specific plug type sold separately
- Translations available in: English, Spanish, French, Portuguese, Arabic, and Russian



Smartphone with Luxor Wi-Fi App wirelessly adjusts lighting at any time



Smartphone with ZDC Color App wirelessly programs more than 30,000 colors



Smartphone with Light Assignment Module (LAM) wirelessly assigns fixtures to groups using ActivAssign™ technology



DIMENSIONS

Overall height: 13"/33 cm
Overall width: 8"/20.3 cm
Overall depth: 5"/15.24 cm

| DESCRIPTION | CODE |
|--|-----------|
| CONTROLLER | LZD, LZDC |
| WATTS | 150, 300 |
| INT'L OPTION | E |
| ORDERING EXAMPLE: ▶ LZD-300-SS = CONTROLLER-WATTAGE-FINISH | |

User Installed Options (order separately)

| DESCRIPTION | CODE |
|---------------------------------|--|
| Wi-Fi MODULE (with antenna) | FXWIFIMOD |
| LAN MODULE FOR CAT-5 CONNECTION | FXLANMOD |
| LIGHT ASSIGNMENT MODULE | LAM (for iOS & Android smartphones and tablets*) |
| LUXOR FACEPACK MOUNT | LUXORFPMNT |

SPECIFICATIONS

| | |
|---------|-----------------------|
| SENSOR | Astronomical Timing |
| DISPLAY | Full Color LCD Screen |

*Not all iOS & Android devices will work with the LAM, please check www.fxli.com/LAMDevices

FINISHES

| Metals | Powder Coat |
|--------|-------------|
| | |
| SS | M |

INTERACTIVE
TABLE OF CONTENTS

FINISHES

LUXOR ZDC

LUXOR CONTROLLERS

ZD MR-16 LAMPS

LUXOR CUBE

POWER CONTROLLERS

INTEGRATED LED

- ACCENT LIGHTS
- PATH & AREA LIGHTS
- WALL LIGHTS
- DOWN LIGHTS
- IN-GRADE/WELL/
SPECIALTY LIGHTS

STANDARD BASES

- ACCENT LIGHTS
- PATH & AREA LIGHTS
- WALL LIGHTS
- DOWN LIGHTS
- IN-GRADE/WELL LIGHTS

ACCESSORIES

WARRANTY

NOW LUXOR® PLAYS WELL *with others*



Zone and Dim with ZD MR-16 Drop-in lamps

The ZD MR-16 is a convenient high-quality drop-in LED replacement lamp that converts incandescent fixtures to energy-efficient LED fixtures. When connected to a Luxor ZD or ZDC controller, the ZD MR-16 adds zoning, dimming, and Wi-Fi control capabilities to any brand of low voltage lighting fixture – and it carries a 5-year warranty.

MODEL CONFIGURATION:

MR-16

ZD

Halogen Equivalent

20

20W

35

35W

Color Temperature

W

Warm (2700K)

C

Cool (3900K)

Beam Angle

VN

Very narrow (10°)

NF

Narrow flood (25°)

FL

Flood (35°)

WF

Wide flood (60°)

UPGRADE ANY SYSTEM WITH ZD MR-16

| DESCRIPTION | CODE |
|------------------------|--|
| BASE | GU5.3 |
| HOUSING | DIE-CAST ZINC |
| INPUT VOLTAGE | 10 TO 15V |
| LAMP LIFE | 40,000 HOURS |
| COLOR TEMPERTURE (CCT) | 2700K AND 3900K |
| BEAM ANGLES | 10° - VERY NARROW FLOOD 25° - NARROW FLOOD 35° - FLOOD 60° - WIDE FLOOD |
| COMPLIANCE | UL, cUL, FCC, RoHS |
| WARRANTY | 5 YEAR LIMITED |

INTERACTIVE
TABLE OF CONTENTS

FINISHES

LUXOR ZDC

LUXOR CONTROLLERS

ZD MR-16 LAMPS

LUXOR CUBE

POWER CONTROLLERS

INTEGRATED LED

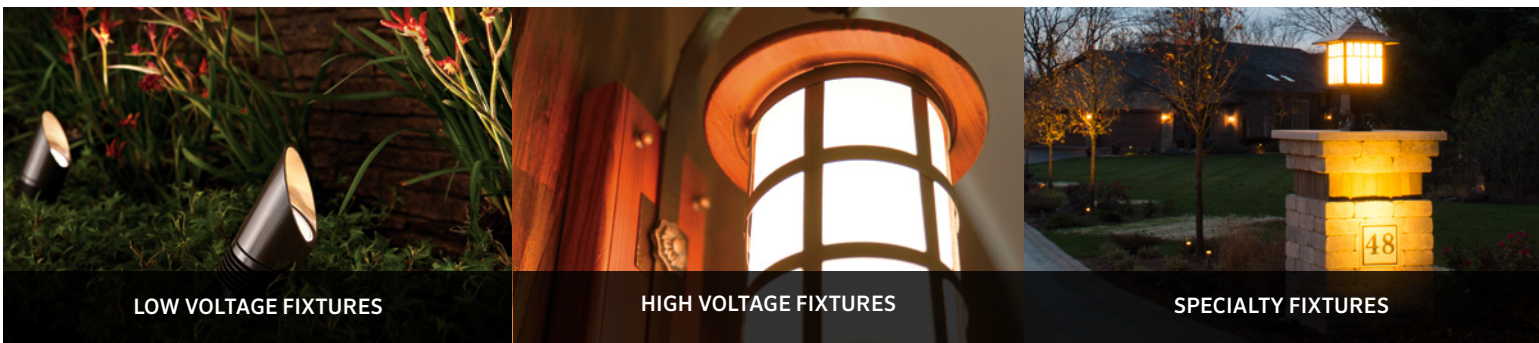
- ACCENT LIGHTS
- PATH & AREA LIGHTS
- WALL LIGHTS
- DOWN LIGHTS
- IN-GRADE/WELL/
SPECIALTY LIGHTS

STANDARD BASES

- ACCENT LIGHTS
- PATH & AREA LIGHTS
- WALL LIGHTS
- DOWN LIGHTS
- IN-GRADE/WELL LIGHTS

ACCESSORIES

WARRANTY



Using the Luxor CUBE, the Luxor controller can now zone and dim other brands of low voltage and line voltage light fixtures. In addition to controlling carriage, entry pillar, and holiday or bistro lights, the CUBE even allows control of water feature pumps, automatic gates, and any item with a relay input.

| TYPE | MODEL NO | MAX LOAD | SUPPORTS* | NOTES |
|---------------|--------------|-------------|---|------------------------------------|
| Low Voltage | LCM-LV | 60W / 5A | AC Dimmable LEDs | |
| | | | Incandescent | Alternate LV power source required |
| High Voltage | LCM-HV | 400W / 3.3A | AC Lighting (Dimmable LED and Incandescent) | Alternate HV power source required |
| Relay / 0-10V | LCM-RLY-010V | 250VAC / 5A | Relay switch | |

3 LUXOR® CUBE MODELS:



LCM-LV Low Voltage



LCM-HV High Voltage



LCM-RLY-010V Relay

* See installation instructions for restrictions and advisory information

➔ INTERACTIVE
TABLE OF CONTENTS

FINISHES

LUXOR ZDC

LUXOR CONTROLLERS

ZD MR-16 LAMPS

LUXOR CUBE

POWER CONTROLLERS

INTEGRATED LED

- ACCENT LIGHTS
- PATH & AREA LIGHTS
- WALL LIGHTS
- DOWN LIGHTS
- IN-GRADE/WELL/
SPECIALTY LIGHTS

STANDARD BASES

- ACCENT LIGHTS
- PATH & AREA LIGHTS
- WALL LIGHTS
- DOWN LIGHTS
- IN-GRADE/WELL LIGHTS

ACCESSORIES

WARRANTY

Power Controllers



INTERACTIVE
TABLE OF CONTENTS

FINISHES

LUXOR ZDC

LUXOR CONTROLLERS

ZD MR-16 LAMPS

LUXOR CUBE

POWER CONTROLLERS

INTEGRATED LED

- ACCENT LIGHTS
- PATH & AREA LIGHTS
- WALL LIGHTS
- DOWN LIGHTS
- IN-GRADE/WELL/
SPECIALTY LIGHTS

STANDARD BASES

- ACCENT LIGHTS
- PATH & AREA LIGHTS
- WALL LIGHTS
- DOWN LIGHTS
- IN-GRADE/WELL LIGHTS

ACCESSORIES

WARRANTY



LX



DIMENSIONS

Overall height: 11.4"/28.9 cm
Overall width: 7.14"/18.1 cm
Overall depth: 5.04"/12.8 cm

The LX is a fully digital transformer. Its integrated LCD screen provides time, photocell, function, and line output readouts. It also features a backlit digital display which means adjustments can easily be made 24/7. It includes six on/off times, a battery backup and a 120V low-voltage indicator.

| DESCRIPTION | | CODE |
|---|---|------------|
| WATTS | | 150 or 300 |
| FINISHES | | |
| Metals | Powder Coat | |
|  |  | |
| SS | M | |




ORDERING EXAMPLE: ▶ **LX150-SS** = CONTROLLER-FINISH

| SPECIFICATIONS | |
|----------------|--|
| SENSOR | PC (12V Photocell and Clock Timer with 6 on/off times) |
| DISPLAY | Backlit Digital LCD Screen |

User Installed Options (order separately)

| Item | Description |
|------------------|--|
| ACCESSORY OPTION | LXPCKIT, (26' Photocell Kit) LX9VBATT, (9V battery adapter for remote programming, battery not incl.) |

The PX has been the industry’s most reliable multi-tap transformer for more than a decade. Safe and easy to install, the PX is assembled in-house and includes many exclusive features .

| DESCRIPTION | | CODE |
|---|---|---|
| WATTS | | 300, 600 or 900 |
| FINISHES | | |
| Metals | Powder Coat - Standard | |
|  |  |  |
| SS | BZ | DG |
| | WI | SB |
| | FB | |
| | WG | FW |
| | | AL |

ORDERING EXAMPLE: ▶ **PX600-PC-SS** = CONTROLLER-SENSOR-FINISH

| SPECIFICATIONS | |
|----------------|--|
| BOX | Stainless Steel |
| SENSORS | T (Timer) PC (Photocell) TPC (Timer and Photocell) |

User Installed Options (order separately)

| Item | Description |
|------------------|---|
| ACCESSORY OPTION | PXSYNC (Lighting Synchronizer to work with irrigation transformers) PXTIMER (Mechanical Timer) PXPC (Photocell) |

PX



DIMENSIONS

Overall height:
300 & 600 watt: 13.5"/34.3 cm
900 watt: 16.5"/41.9 cm
Overall width: 7.5"/19.1 cm
Overall depth: 6"/15.2 cm

FINISHES

LUXOR ZDC

LUXOR CONTROLLERS

ZD MR-16 LAMPS

LUXOR CUBE

POWER CONTROLLERS

INTEGRATED LED

- ACCENT LIGHTS
- PATH & AREA LIGHTS
- WALL LIGHTS
- DOWN LIGHTS
- IN-GRADE/WELL/
SPECIALTY LIGHTS

STANDARD BASES

- ACCENT LIGHTS
- PATH & AREA LIGHTS
- WALL LIGHTS
- DOWN LIGHTS
- IN-GRADE/WELL LIGHTS

ACCESSORIES

WARRANTY

LED Accent Lights

DESIGNED
TO ENHANCE

Utilizing accent lights in a landscape lighting system design can add a tremendous amount of texture, contrast and interest. FX Luminaire provides highly efficient LED accent lights for virtually any outdoor application.

INTERACTIVE
TABLE OF CONTENTS

FINISHES

LUXOR ZDC

LUXOR CONTROLLERS

ZD MR-16 LAMPS

LUXOR CUBE

POWER CONTROLLERS

INTEGRATED LED

- ACCENT LIGHTS
- PATH & AREA LIGHTS
- WALL LIGHTS
- DOWN LIGHTS
- IN-GRADE/WELL/
SPECIALTY LIGHTS

STANDARD BASES

- ACCENT LIGHTS
- PATH & AREA LIGHTS
- WALL LIGHTS
- DOWN LIGHTS
- IN-GRADE/WELL LIGHTS

ACCESSORIES

WARRANTY











QZ



DIMENSIONS

Height: 5.75"/14.61 cm
Diameter: 1.75"/4.45 cm

The QZ is a small, sleek up light that can be hidden in tight spaces to create interesting design effects.

| DESCRIPTION | CODE | | | | | | | |
|---|--|---|---|---|---|---|---|---|
| FIXTURE | QZ | | | | | | | |
| LUXOR OPTION | ZD | | | | | | | |
| LEDs | 1LED | | | | | | | |
| FINISHES | | | | | | | | |
| Powder Coat - Standard | | | | | Powder Coat - Specialty | | |   QZ-1LED-BZ |
|  |  |  |  |  |  |  |  | |
| BZ | DG | WI | SB | FB | WG | FW | AL | |

ORDERING EXAMPLE: ▶ QZ-ZD-1LED-BZ = FIXTURE-ZD OPTION-LED-FINISH

| SPECIFICATIONS | 1 LED |
|---------------------------------|---------|
| HALOGEN LUMEN OUTPUT EQUIVALENT | 10 watt |
| WATTS USED/VA TOTAL | 2.0/2.4 |
| MAX LUMENS | 62 |










FB



DIMENSIONS

Height: 7.5"/19 cm
Diameter: 2"/5 cm

The FB is sleek, compact, and fits well into tight spaces. It accommodates up to a 3 LED Board.

| DESCRIPTION | CODE | | | | | | | |
|---|--|---|---|---|---|---|---|--|
| FIXTURE | FB | | | | | | | |
| LUXOR OPTION | ZD, ZDC (Color)* | | | | | | | |
| LEDs | 1LED, 3LED, [Blank]* | | | | | | | |
| FINISHES | | | | | | | | |
| Powder Coat - Standard | | | | | Powder Coat - Specialty | | | <div><div>6</div><div></div><div>FB-3LED-BZ</div></div> |
|  |  |  |  |  |  |  |  | |
| BZ | DG | WI | SB | FB | WG | FW | AL | |

ORDERING EXAMPLE: ▶ FB-1LED-BZ = FIXTURE-LED-FINISH

| SPECIFICATIONS | 1 LED | 3 LED | ZDC |
|---------------------------------|---------|---------|-----------|
| HALOGEN LUMEN OUTPUT EQUIVALENT | 10 watt | 20 watt | 10 watt |
| WATTS USED/VA TOTAL | 2.0/2.4 | 4.2/4.5 | 6.0 / 7.2 |
| MAX LUMENS | 60 | 155 | 90 |

 ZDC capable fixture

+ Fixtures specified with ZDC Technology™ are available only in one circuit board configuration. Do not specify a number of LEDs when ordering.

INTERACTIVE
TABLE OF CONTENTS

FINISHES

LUXOR ZDC

LUXOR CONTROLLERS

ZD MR-16 LAMPS

LUXOR CUBE

POWER CONTROLLERS

INTEGRATED LED

- ACCENT LIGHTS
- PATH & AREA LIGHTS
- WALL LIGHTS
- DOWN LIGHTS
- IN-GRADE/WELL/
SPECIALTY LIGHTS

STANDARD BASES

- ACCENT LIGHTS
- PATH & AREA LIGHTS
- WALL LIGHTS
- DOWN LIGHTS
- IN-GRADE/WELL LIGHTS

ACCESSORIES

WARRANTY











NP



DIMENSIONS

Height: 8.4"/21.2 cm
Long Shield: 10.3"/26.1 cm
Diameter: 2.7"/6.8 cm

The NP is highly versatile and can be fine-tuned to beautify any landscape feature.

| DESCRIPTION | CODE | | | | | | | | |
|---|--|---|---|---|---|---|---|---|--|
| FIXTURE | NP | | | | | | | | |
| LUXOR OPTION | ZD, ZDC (Color)* | | | | | | | | |
| LEDs | 1LED, 3LED, 6LED, 9LED, [Blank]* | | | | | | | | |
| SHIELD OPTION | LS (Long Shield) | | | | | | | | |
| FINISHES | | | | | | | | | |
| Powder Coat - Standard | | | | | Powder Coat - Specialty | | |   | |
|  |  |  |  |  |  |  |  | | |
| BZ | DG | WI | SB | FB | WG | FW | AL | | |

ORDERING EXAMPLE: ▶ NP-ZD-6LED-BZ = FIXTURE-ZD OPTION-LED-FINISH

| SPECIFICATIONS | 1 LED | 3 LED (ZDC) | 6 LED | 9 LED |
|---------------------------------|---------|--------------------|-----------|-----------|
| HALOGEN LUMEN OUTPUT EQUIVALENT | 10 watt | 20 watt | 35 watt | 50 watt |
| WATTS USED/VA TOTAL | 2.0/2.4 | 4.2/4.5 (9.1/11.0) | 10.1/13.5 | 11.2/13.5 |
| MAX LUMENS | 51 | 130 (112) | 241 | 357 |

NOTE: Useful LED Life L70 (Avg): 50,000 hrs. Input Voltage: 10 to 15 V.






NR




DIMENSIONS

Height: 8.4"/21.2 cm
Long Shroud: 10.3"/26.1 cm
Diameter: 2.7"/6.8 cm

The NR is a copper and brass version of the popular NP up light, perfect for coastal areas and other harsh environments.

| DESCRIPTION | CODE | | | |
|---|--|---|---|---|
| FIXTURE | NR | | | |
| LUXOR OPTION | ZD, ZDC (Color)* | | | |
| LEDs | 1LED, 3LED, 6LED, 9LED, [Blank]* | | | |
| SHIELD OPTION | LS (Long Shroud) | | | |
| FINISHES | | | | |
| Powder Coat - Standard | | | | |
|  |  |  |  |  |
| BZ | DG | WI | SB | FB |



ORDERING EXAMPLE: ▶ NR-ZD-6LED-AT = FIXTURE-ZD OPTION-LED-FINISH

| SPECIFICATIONS | 1 LED | 3 LED | 6 LED | 9 LED | ZDC |
|---------------------------------|---------|---------|-----------|-----------|----------|
| HALOGEN LUMEN OUTPUT EQUIVALENT | 10 watt | 20 watt | 35 watt | 50 watt | 20 watt |
| WATTS USED/VA TOTAL | 2.0/2.4 | 4.2/4.5 | 10.1/13.5 | 11.2/13.5 | 9.1/11.0 |
| MAX LUMENS | 52 | 135 | 279 | 357 | 112 |

NOTE: Useful LED Life L70 (Avg): 50,000 hrs. Input Voltage: 10 to 15 V.

 ZDC capable fixture
† Fixtures specified with ZDC Technology™ are available only in one circuit board configuration. Do not specify a number of LEDs when ordering.

INTERACTIVE
TABLE OF CONTENTS

FINISHES

LUXOR ZDC

LUXOR CONTROLLERS

ZD MR-16 LAMPS

LUXOR CUBE

POWER CONTROLLERS

INTEGRATED LED

- ACCENT LIGHTS
- PATH & AREA LIGHTS
- WALL LIGHTS
- DOWN LIGHTS
- IN-GRADE/WELL/
SPECIALTY LIGHTS


STANDARD BASES

- ACCENT LIGHTS
- PATH & AREA LIGHTS
- WALL LIGHTS
- DOWN LIGHTS
- IN-GRADE/WELL LIGHTS

ACCESSORIES

WARRANTY





CC



SPECIFICATIONS

Overall height: 5.3"/13.3 cm
Long shield height: 6.4"/16.3 cm
Exposed diameter: 1.6"/4.1 cm

The CC fuses high design with precision engineering, making it ideal for small-scale elements.

| DESCRIPTION | CODE |
|---|--|
| FIXTURE | CC |
| LUXOR OPTION | ZD, ZDC (Color)* |
| LEDs | 1LED, 3LED, [Blank]* |
| SHIELD OPTION | LS (Long Shield) |
| FINISHES | |
| Metals | |
|  AB* on brass |  AT* on brass |
|  NP* |  BS |

ORDERING EXAMPLE: ▶ **CC-ZDC-BS** = FIXTURE-ZD OPTION-FINISH

| SPECIFICATIONS | 1 LED | 3 LED | ZDC |
|---------------------------------|---------|---------|-----------|
| HALOGEN LUMEN OUTPUT EQUIVALENT | 10 watt | 20 watt | 10 watt |
| WATTS USED/VA TOTAL | 2.0/2.4 | 4.2/4.5 | 6.0 / 7.2 |
| MAX LUMENS | 59 | 123 | 109 |





VS



SPECIFICATIONS

Overall height: 7"/17.8 cm
Long shield height: 8.3"/21.2 cm
Exposed diameter: 2.5"/6.4 cm

Designed for mid-size landscapes, the VS provides unmatched elegance and function.

| DESCRIPTION | CODE |
|---|--|
| FIXTURE | VS |
| LUXOR OPTION | ZD, ZDC (Color)* |
| LEDs | 1LED, 3LED, 6LED, 9LED, [Blank]* |
| SHIELD OPTION | LS (Long Shield) |
| FINISHES | |
| Metals | |
|  AB* on brass |  AT* on brass |
|  NP* |  BS |

ORDERING EXAMPLE: ▶ **VS-ZDC-LS-BS** = FIXTURE-ZD OPTION-LED-SHIELD OPTION-FINISH

| SPECIFICATIONS | 1 LED | 3 LED | 6 LED | 9 LED | ZDC |
|---------------------------------|---------|---------|-----------|-----------|----------|
| HALOGEN LUMEN OUTPUT EQUIVALENT | 10 watt | 20 watt | 35 watt | 50 watt | 20 watt |
| WATTS USED/VA TOTAL | 2.0/2.4 | 4.2/4.5 | 10.1/13.5 | 11.2/13.5 | 9.1/11.0 |
| MAX LUMENS | 59 | 159 | 279 | 357 | 119 |

NOTE: Useful LED Life L70 (Avg): 50,000 hrs. Input Voltage: 10 to 15 V.

* May require longer lead time  ZDC capable fixture
+ Fixtures specified with ZDC Technology™ are available only in one circuit board configuration. Do not specify a number of LEDs when ordering.

INTERACTIVE
TABLE OF CONTENTS

FINISHES

LUXOR ZDC

LUXOR CONTROLLERS

ZD MR-16 LAMPS

LUXOR CUBE

POWER CONTROLLERS

INTEGRATED LED

- ACCENT LIGHTS
PATH & AREA LIGHTS
WALL LIGHTS
DOWN LIGHTS
IN-GRADE/WELL/
SPECIALTY LIGHTS

STANDARD BASES

- ACCENT LIGHTS
PATH & AREA LIGHTS
WALL LIGHTS
DOWN LIGHTS
IN-GRADE/WELL LIGHTS

ACCESSORIES

WARRANTY

PB



DIMENSIONS

Height: 5.5"/13.9 cm
Width: 3.9"/9.8 cm
Depth: 2"/5 cm

The wider angle of the PB allows broader lighting for larger structures and spaces.

| DESCRIPTION | CODE |
|-------------------------|----------------------|
| FIXTURE | PB |
| LUXOR OPTION | ZD, ZDC (Color)* |
| LEDs | 1LED, 3LED, [Blank]* |
| FINISHES | |
| Metals | |
| Powder Coat - Standard | |
| Powder Coat - Specialty | |
| AB* on brass | AT* on brass |
| NP* | BS |
| BZ | DG |
| WI | SB |
| FB | WG |
| FW | AL |
| PB-3LED-BZ | |

ORDERING EXAMPLE: ▶ PB-1LED-NP = FIXTURE-LED-FINISH

| SPECIFICATIONS | 1 LED | 3 LED | ZDC |
|---------------------------------|---------|---------|-----------|
| HALOGEN LUMEN OUTPUT EQUIVALENT | 10 watt | 20 watt | 10 watt |
| WATTS USED/VA TOTAL | 2.0/2.4 | 4.2/4.5 | 6.0 / 7.2 |
| MAX LUMENS | 71 | 151 | 120 |

LC



DIMENSIONS

Height: 6.5"/16.5 cm
Width: 4.5"/11.4 cm
Depth: 3"/7.6 cm

Our largest wall-wash up light, projects a broad spectrum of light on large walls and spaces.

| DESCRIPTION | CODE |
|-------------------------|----------------------------------|
| FIXTURE | LC |
| LUXOR OPTION | ZD, ZDC (Color)* |
| LEDs | 1LED, 3LED, 6LED, 9LED, [Blank]* |
| FINISHES | |
| Metals | |
| Powder Coat - Standard | |
| Powder Coat - Specialty | |
| AB* on brass | AT* on brass |
| NP* | BS |
| BZ | DG |
| WI | SB |
| FB | WG |
| FW | AL |
| LC-9LED-BZ | |

ORDERING EXAMPLE: ▶ LC-ZD-9LED-BZ = FIXTURE-ZD OPTION-LED-FINISH

| SPECIFICATIONS | 1 LED | 3 LED | 6 LED | 9 LED | ZDC |
|---------------------------------|---------|---------|-----------|-----------|----------|
| HALOGEN LUMEN OUTPUT EQUIVALENT | 10 watt | 20 watt | 35 watt | 50 watt | 20 watt |
| WATTS USED/VA TOTAL | 2.0/2.4 | 4.2/4.5 | 10.1/13.5 | 11.2/13.5 | 9.1/11.0 |
| MAX LUMENS | 63 | 154 | 331 | 436 | 192 |

NOTE: Useful LED Life L70 (Avg): 50,000 hrs. Input Voltage: 10 to 15 V.

* May require longer lead time
† Fixtures specified with ZDC Technology™ are available only in one circuit board configuration. Do not specify a number of LEDs when ordering.

➔ INTERACTIVE
TABLE OF CONTENTS

FINISHES

LUXOR ZDC

LUXOR CONTROLLERS

ZD MR-16 LAMPS

LUXOR CUBE

POWER CONTROLLERS

INTEGRATED LED

- ACCENT LIGHTS
- PATH & AREA LIGHTS
- WALL LIGHTS
- DOWN LIGHTS
- IN-GRADE/WELL/
SPECIALTY LIGHTS

STANDARD BASES

- ACCENT LIGHTS
- PATH & AREA LIGHTS
- WALL LIGHTS
- DOWN LIGHTS
- IN-GRADE/WELL LIGHTS

ACCESSORIES

WARRANTY



QB



DIMENSIONS

Height: 5.95"/15.12 cm
Diameter: 2.93"/7.45 cm

The QB is our most compact and affordable LED wall wash fixture compatible with the Luxor system. Offered in 1 LED, its petite size is perfect for illuminating tight spaces.

| DESCRIPTION | CODE |
|--------------|------|
| FIXTURE | QB |
| LUXOR OPTION | ZD |
| LEDs | 1LED |

| FINISHES | | | | |
|-------------------------|----|----|----|----|
| Powder Coat - Standard | | | | |
| BZ | DG | WI | SB | FB |
| Powder Coat - Specialty | | | | |
| WG | FW | AL | SV | |

ORDERING EXAMPLE: ➤ QB-ZD-1LED-FB = FIXTURE-ZD OPTION-LED-FINISH

| SPECIFICATIONS | 1 LED |
|---------------------------------|---------|
| HALOGEN LUMEN OUTPUT EQUIVALENT | 10 watt |
| WATTS USED/VA TOTAL | 2.0/2.4 |
| MAX LUMENS | 73 |

FINISHES

LUXOR ZDC

LUXOR CONTROLLERS

ZD MR-16 LAMPS

LUXOR CUBE

POWER CONTROLLERS

INTEGRATED LED

- ACCENT LIGHTS
- PATH & AREA LIGHTS
- WALL LIGHTS
- DOWN LIGHTS
- IN-GRADE/WELL/
SPECIALTY LIGHTS

STANDARD BASES

- ACCENT LIGHTS
- PATH & AREA LIGHTS
- WALL LIGHTS
- DOWN LIGHTS
- IN-GRADE/WELL LIGHTS

ACCESSORIES

WARRANTY

LED Path & Area Lights

DESIGNED TO
ILLUMINATE

FX LED path lights offer safe illumination for walkways and create ambiance to highlight landscape features along the way. Choose from a wide array of styles in metal and powder coat finishes to complement any setting.

INTERACTIVE
TABLE OF CONTENTS

FINISHES

LUXOR ZDC

LUXOR CONTROLLERS

ZD MR-16 LAMPS

LUXOR CUBE

POWER CONTROLLERS

INTEGRATED LED

ACCENT LIGHTS

PATH & AREA LIGHTS

WALL LIGHTS

DOWN LIGHTS

IN-GRADE/WELL/
SPECIALTY LIGHTS

STANDARD BASES

ACCENT LIGHTS

PATH & AREA LIGHTS

WALL LIGHTS

DOWN LIGHTS

IN-GRADE/WELL LIGHTS

ACCESSORIES









WARRANTY

LIGHT ON MATERIAL, BIG ON ILLUMINATION

Constructed with lightweight, reliable aluminum, these mid-sized fixtures feature sleek lines and aesthetic design which beautifully enhance and complement any landscape.












STEP 1 TOP ASSEMBLY


| DESCRIPTION | CODE | | | | | | |
|--|--|--|--|--|--|---|--|
| TOP ASSEMBLY | TMLEDTA, PLLEDTA | | | | | | |
| TOP ASSEMBLY FINISHES | | | | | | | |
| Powder Coat - Standard | | | | | Powder Coat - Specialty | | |
|  |  |  |  |  |  |  |  |
| BZ | DG | WI | SB | FB | WG | FW | AL |



STEP 2 RISER ASSEMBLY

| DESCRIPTION | CODE | | | | | | |
|---|---|---|---|---|---|--|---|
| RISER TYPE | A (Aluminum) | | | | | | |
| LUXOR OPTION | ZD, ZDC (Color)* | | | | | | |
| LAMP | 1LED, 3LED, [Blank]* | | | | | | |
| RISER HEIGHT | 8RA, 12RA, 18RA, 24RA*, 30RA*, 36RA* | | | | | | |
| RISER FINISHES | | | | | | | |
| Powder Coat - Standard | | | | Powder Coat - Specialty | | | |
|  |  |  |  |  |  |  |  |
| BZ | DG | WI | SB | FB | WG | FW | AL |





TM-LED-TA-BZ
PL-LED-TA-BZ
A-1LED-12RA-BZ



TM-LED-TA-BZ
PL-LED-TA-BZ
A-1LED-12RA-BZ

ORDERING EXAMPLE: ▶ **PLLEDTA-BZ** = TOP ASSEMBLY-TOP FINISH (STEP 1)
▶ **A-3LED-12RA-BZ** = RISER TYPE-LED-RISER HEIGHT-RISER FINISH (STEP 2)

| SPECIFICATIONS | 1 LED | 3 LED | ZDC |
|---------------------------------|---------|---------|-----------|
| HALOGEN LUMEN OUTPUT EQUIVALENT | 10 watt | 20 watt | 10 watt |
| WATTS USED/VA TOTAL | 2.0/2.4 | 4.2/4.5 | 6.0 / 7.2 |
| MAX LUMENS | 39 | 103 | 66 |

NOTE: Useful LED Life L70 (Avg): 50,000 hrs. Input Voltage: 10 to 15 V.
Both Top and Riser Assemblies are required to complete the fixture.

+ Fixtures specified with ZDC Technology™ are available only in one circuit board configuration. Do not specify a number of LEDs when ordering.

INTERACTIVE
TABLE OF CONTENTS

FINISHES

LUXOR ZDC

LUXOR CONTROLLERS

ZD MR-16 LAMPS

LUXOR CUBE

POWER CONTROLLERS

INTEGRATED LED

- ACCENT LIGHTS
- PATH & AREA LIGHTS
- WALL LIGHTS
- DOWN LIGHTS
- IN-GRADE/WELL/
SPECIALTY LIGHTS







STANDARD BASES

- ACCENT LIGHTS
- PATH & AREA LIGHTS
- WALL LIGHTS
- DOWN LIGHTS
- IN-GRADE/WELL LIGHTS

ACCESSORIES

WARRANTY

PETITE

| | | |
|---|---|---|
|  |  |  |
| BD | EA | HC |
| DIMENSIONS Overall height: 15.5"/39.4 cm Exposed width: 4.7"/11.9 cm | DIMENSIONS Overall height: 15.9"/40.4 cm Exposed width: 4.7"/11.9 cm | DIMENSIONS Overall height: 15"/38.1 cm Exposed width: 3.6"/9.2 cm |
|  |  |  |
| PF | PR | SC |
| DIMENSIONS Overall height: 15"/38.1 cm Exposed width: 5"/12.7 cm | DIMENSIONS Overall height: 15"/38.1 cm Exposed width: 3.8"/9.7 cm | DIMENSIONS Overall height: 15.5"/39.4 cm Exposed width: 4.7"/11.9 cm |

Petite LED path lights are small in stature but big on looks, efficiency, and reliability. Just as beautiful as the light they emit, designers can find a petite 1LED model to match the most elegant and edgy motifs.

GRANDE

| | | |
|---|---|---|
|  |  |  |
| CB | QF | JS |
| DIMENSIONS Overall height: 16.2"/41.2 cm Exposed width: 7.4"/18.8 cm | DIMENSIONS Overall height: 16.8"/42.7 cm Exposed width: 7.4"/18.8 cm | DIMENSIONS Overall height: 16.5"/41.9 cm Exposed width: 6.3"/16 cm |
|  |  |  |
| DM | CV | CA |
| DIMENSIONS Overall height: 16.2"/41.2 cm Exposed width: 7.1"/18 cm | DIMENSIONS Overall height: 15.8"/40.1 cm Exposed width: 7.4"/18.3 cm | DIMENSIONS Overall height: 16.2"/41.2 cm Exposed width: 7.4"/18.8 cm |

Grande LED path lights are a larger version of the petites and are available in both 1 or 3 LED options.

 ZDC capable fixture

INTERACTIVE
TABLE OF CONTENTS

FINISHES

LUXOR ZDC

LUXOR CONTROLLERS

ZD MR-16 LAMPS

LUXOR CUBE

POWER CONTROLLERS

INTEGRATED LED

ACCENT LIGHTS

PATH & AREA LIGHTS

WALL LIGHTS

DOWN LIGHTS

IN-GRADE/WELL/
SPECIALTY LIGHTS

STANDARD BASES

ACCENT LIGHTS

PATH & AREA LIGHTS

WALL LIGHTS

DOWN LIGHTS

IN-GRADE/WELL LIGHTS

ACCESSORIES

WARRANTY



STEP 1 TOP ASSEMBLY

| DESCRIPTION | CODE |
|---------------------|---|
| PETITE TOP ASSEMBLY | BDLEDTA, EALEDTA, HCLEDTA, PFLEDTA,PRLEDTA, SCLEDTA |
| GRANDE TOP ASSEMBLY | CBLEDTA, QFLEDTA, JSLEDTA, DMLEDTA,CVLEDTA, CALEDTA |

TOP ASSEMBLY FINISHES

| Metals | | | | Powder Coat - Standard | | | | | Powder Coat - Specialty | | |
|------------------|------------------|----|-----|------------------------|----|----|----|----|-------------------------|----|----|
| | | | | | | | | | | | |
| AB* on copper | AT* on copper | CU | NP* | BZ | DG | WI | SB | FB | WG | FW | AL |



STEP 2 RISER ASSEMBLY

| DESCRIPTION | CODE |
|--------------|-------------------------------------|
| RISER TYPE | P (Petite), G (Grande) |
| LUXOR OPTION | ZD, ZDC (Color, Grande riser only)* |
| LAMP | 1LED, 3LED (Grande only), [Blank]* |
| RISER HEIGHT | 8RA, 12RA, 18RA, 24RA*, 36RA* |

RISER FINISHES

| Metals | | | | Powder Coat - Standard | | | | | Powder Coat - Specialty | | |
|------------------|------------------|----|-----|------------------------|----|----|----|----|-------------------------|----|----|
| | | | | | | | | | | | |
| AB* on copper | AT* on copper | CU | NP* | BZ | DG | WI | SB | FB | WG | FW | AL |



P-1LED-12RA-CU
HC-LED-TA-CU
G-3LED-12RA-CU
DM-LED-TA-CU

ORDERING EXAMPLE: ▶ **CBLEDTA-CU**= TOP ASSEMBLY-TOP FINISH (STEP 1)
▶ **G-3LED-12RA-CU** = RISER TYPE-LED-RISER HEIGHT-RISER FINISH (STEP 2)

| SPECIFICATIONS | 1 LED | 3 LED | ZDC |
|---------------------------------|---------|---------|-----------|
| HALOGEN LUMEN OUTPUT EQUIVALENT | 10 watt | 20 watt | 10 watt |
| WATTS USED/VA TOTAL | 2.0/2.4 | 4.2/4.5 | 6.0 / 7.2 |
| MAX LUMENS | 39 | 103 | 73 |

NOTE: Useful LED Life L70 (Avg): 50,000 hrs. Input Voltage: 10 to 15 V.
Only the copper portions of the path lights are powder coated. The brass pieces remain natural.
Both Top and Riser Assemblies are required to complete the fixture

* May require longer lead time † Fixtures specified with ZDC Technology™ are available only in one circuit board configuration. Do not specify a number of LEDs when ordering.

WARRANTY

* May require longer lead time  ZDC capable fixture

+ Fixtures specified with ZDC Technology™ are available only in one circuit board configuration. Do not specify a number of LEDs when ordering.

INTERACTIVE
TABLE OF CONTENTS

FINISHES

LUXOR ZDC

LUXOR CONTROLLERS

ZD MR-16 LAMPS

LUXOR CUBE

POWER CONTROLLERS

INTEGRATED LED

- ACCENT LIGHTS
- PATH & AREA LIGHTS
- WALL LIGHTS
- DOWN LIGHTS
- IN-GRADE/WELL/
SPECIALTY LIGHTS

STANDARD BASES

- ACCENT LIGHTS
- PATH & AREA LIGHTS
- WALL LIGHTS
- DOWN LIGHTS
- IN-GRADE/WELL LIGHTS

ACCESSORIES

WARRANTY











PM



DIMENSIONS

Height: 14"/35.56 cm
XT Height: 18.5"/47.0 cm
Diameter: 2.5"/6.35 cm

The PM was designed for the avant garde gravel and ornamental grass garden. Constructed from aerospace aluminum alloy, it is as durable as it is attractive.

| DESCRIPTION | CODE | | | | | | | | |
|---|--|---|---|---|---|---|---|---|---|
| FIXTURE | PM | | | | | | | | |
| LUXOR OPTIONS | ZD, ZDC (Color)* | | | | | | | | |
| LEDs | 1LED, 3LED, 6LED, 9LED, [Blank]* | | | | | | | | |
| RISER HEIGHT OPTION | XT (Extra tall) | | | | | | | | |
| FINISHES | | | | | | | | | |
| Powder Coat - Standard | | | | | Powder Coat - Specialty | | | |  PM-3LED-BZ |
|  |  |  |  |  |  |  |  |  | |
| BZ | DG | WI | SB | FB | WG | FW | AL | SV | |

ORDERING EXAMPLE: ▶ **PM-ZD-3LED-DG** = FIXTURE-ZD OPTION-LED-FINISH

| SPECIFICATIONS | 1 LED | 3 LED | 6 LED | 9 LED | ZDC |
|---------------------------------|---------|---------|-----------|-----------|----------|
| HALOGEN LUMEN OUTPUT EQUIVALENT | 10 watt | 20 watt | 35 watt | 50 watt | 20 watt |
| WATTS USED/VA TOTAL | 2.0/2.4 | 4.2/4.5 | 10.1/13.5 | 11.2/13.5 | 9.1/11.0 |
| MAX LUMENS | 59 | 159 | 279 | 357 | 74 |










RW



DIMENSIONS

Height: 14"/35.56 cm
Diameter: 2.5"/6.35 cm

The versatile RW was designed to be used as an up light or directional path light. The RW offers adjustable beam spread and soft illumination to wash walls and create a gentle glow.

| DESCRIPTION | CODE | | | | | | | |
|---|--|---|---|---|---|---|---|---|
| FIXTURE | RW | | | | | | | |
| LUXOR OPTIONS | ZD, ZDC (Color)* | | | | | | | |
| LEDs | 1LED, 3LED, 6LED, 9LED, [Blank]* | | | | | | | |
| RISER HEIGHT OPTION | 8R, 12R, 18R, 24R, 30R, 36R | | | | | | | |
| FINISHES | | | | | | | | |
| Powder Coat - Standard | | | | | Powder Coat - Specialty | | | |
|  |  |  |  |  |  |  |  |  |
| BZ | DG | WI | SB | FB | WG | FW | AL | SV |

ORDERING EXAMPLE: ▶ **RW-ZD-3LED-FB** = FIXTURE-ZD OPTION-LED-RISER HEIGHT OPTION-FINISH

| SPECIFICATIONS | 1 LED | 3 LED | 6 LED | 9 LED | ZDC |
|---------------------------------|---------|---------|-----------|-----------|----------|
| HALOGEN LUMEN OUTPUT EQUIVALENT | 10 watt | 20 watt | 35 watt | 50 watt | 20 watt |
| WATTS USED/VA TOTAL | 2.0/2.4 | 4.2/4.5 | 10.1/13.5 | 11.2/13.5 | 9.1/11.0 |
| MAX LUMENS | 59 | 159 | 279 | 357 | 188 |

NOTE: Useful LED Life L70 (Avg): 50,000 hrs. Input Voltage: 10 to 15 V.

 ZDC capable fixture
+ Fixtures specified with ZDC Technology™ are available only in one circuit board configuration. Do not specify a number of LEDs when ordering.

FINISHES

LUXOR ZDC

LUXOR CONTROLLERS

ZD MR-16 LAMPS

LUXOR CUBE

POWER CONTROLLERS

INTEGRATED LED

- ACCENT LIGHTS
- PATH & AREA LIGHTS
- WALL LIGHTS
- DOWN LIGHTS
- IN-GRADE/WELL/
SPECIALTY LIGHTS

STANDARD BASES

- ACCENT LIGHTS
- PATH & AREA LIGHTS
- WALL LIGHTS
- DOWN LIGHTS
- IN-GRADE/WELL LIGHTS

ACCESSORIES

WARRANTY

LED Wall Lights



DESIGNED
TO DEFINE

Incorporate FX Luminaire LED wall lights in your design to increase safety, define perimeters, and enhance architectural walls and stonework. Choose from a variety of styles to seamlessly integrate into any setting.

INTERACTIVE
TABLE OF CONTENTS

FINISHES

LUXOR ZDC

LUXOR CONTROLLERS

ZD MR-16 LAMPS

LUXOR CUBE

POWER CONTROLLERS

INTEGRATED LED

- ACCENT LIGHTS
- PATH & AREA LIGHTS
- WALL LIGHTS
- DOWN LIGHTS
- IN-GRADE/WELL/
SPECIALTY LIGHTS


STANDARD BASES

- ACCENT LIGHTS
- PATH & AREA LIGHTS
- WALL LIGHTS
- DOWN LIGHTS
- IN-GRADE/WELL LIGHTS

ACCESSORIES

WARRANTY

MS



DIMENSIONS

Diameter: 3.7"/9.3 cm
Depth: 2"/5.1 cm



LF



DIMENSIONS

Height: .9"/2.2 cm
Width: 6.7"/17 cm
Depth: 3.6"/9.2 cm

The unique look and soft glow of the MS adds interest to any system design. Changeable filters provide for an array of memorable effects.

| DESCRIPTION | CODE |
|---|------------------------|
| FIXTURE | MS |
| LUXOR OPTION | ZD |
| LEDs | 1LED |
| FINISHES | |
| Metals | Powder Coat - Standard |
| AB* on brass | AT* on brass |
| NP* | BS |
| BZ | DG |
| WI | SB |
| FB | WG |
| FW | AL |
| Powder Coat - Specialty | |
|   MS-1LED-BZ | |

ORDERING EXAMPLE: ▶ **MS-1LED-BS** = FIXTURE-LED-FINISH

| SPECIFICATIONS | 1 LED |
|---------------------------------|---------|
| HALOGEN LUMEN OUTPUT EQUIVALENT | 10 watt |
| WATTS USED/VA TOTAL | 2.0/2.4 |
| MAX LUMENS | 52 |

The LF is our LED under-the-cap hardscape wall light. It can easily fit between a block wall and capstone for a neat, clean installation.

| DESCRIPTION | CODE |
|-------------------------|------------------------|
| FIXTURE | LF |
| LUXOR OPTION | ZD |
| LEDs | 1LED |
| FINISHES | |
| Metals | Powder Coat - Standard |
| CU-AB* on copper | CU-AT* on copper |
| BS-AB* on brass | BS-AT* on brass |
| CU | BS |
| SS | BZ |
| DG | WI |
| SB | FB |
| WG | FW |
| AL | |
| Powder Coat - Specialty | |

ORDERING EXAMPLE: ▶ **LF-1LED-BS** = FIXTURE-LED-FINISH

| SPECIFICATIONS | 1 LED |
|---------------------------------|---------|
| HALOGEN LUMEN OUTPUT EQUIVALENT | 10 watt |
| WATTS USED/VA TOTAL | 2.0/2.4 |
| MAX LUMENS | 77 |



NOTE: Useful LED Life L70 (Avg): 50,000 hrs. Input Voltage: 10 to 15 V.

** May require longer lead time*
+ Fixtures specified with ZDC Technology™ are available only in one circuit board configuration. Do not specify a number of LEDs when ordering.

INTERACTIVE
TABLE OF CONTENTS

FINISHES

LUXOR ZDC

LUXOR CONTROLLERS

ZD MR-16 LAMPS

LUXOR CUBE

POWER CONTROLLERS

INTEGRATED LED

- ACCENT LIGHTS
- PATH & AREA LIGHTS
- WALL LIGHTS
- DOWN LIGHTS
- IN-GRADE/WELL/
SPECIALTY LIGHTS


STANDARD BASES

- ACCENT LIGHTS
- PATH & AREA LIGHTS
- WALL LIGHTS
- DOWN LIGHTS
- IN-GRADE/WELL LIGHTS

ACCESSORIES

WARRANTY

LM



DIMENSIONS

Height: 3.5"/8.9 cm
Width: 9"/22.9 cm
Depth: 4"/10.16 cm
Lead length: 10'/3 m

PD



DIMENSIONS

Height: 3.5"/8.9 cm
Width: 9"/22.9 cm
Depth: 4"/10.16 cm
Lead length: 10'/3 m

When a project calls for a higher level of illumination, the LM is the perfect solution. It can be used alone or with the compact UN to maintain consistent lighting and style.

| DESCRIPTION | CODE |
|--|------|
| FIXTURE | LM |
| LUXOR OPTION | ZD |
| LEDs | 2LED |
| FINISHES | |
| <div><div>Metals</div><div><div>AB* on copper</div><div>AT* on copper</div><div>NP*</div><div>CU</div></div></div> <div><div>Powder Coat - Standard</div><div><div>BZ</div><div>DG</div><div>WI</div><div>SB</div><div>FB</div></div></div> <div><div>Powder Coat - Specialty</div><div><div>WG</div><div>FW</div><div>AL</div></div></div> <div><div>LM-2LED-CU</div></div> | |

ORDERING EXAMPLE: ▶ LM-2LED-CU = FIXTURE-LED-FINISH

| SPECIFICATIONS | 2 LED |
|---------------------------------|-----------|
| HALOGEN LUMEN OUTPUT EQUIVALENT | 10 watt |
| WATTS USED/VA TOTAL | 4.0 / 4.8 |
| MAX LUMENS | 6 |

When a project calls for a higher level of illumination, the PD is the perfect solution. It can be used alone or with the compact CP to maintain consistent lighting and style.

| DESCRIPTION | CODE |
|---|------|
| FIXTURE | UN |
| LUXOR OPTION | ZD |
| LEDs | 2LED |
| FINISHES | |
| <div><div>Metals</div><div><div>AB* on brass</div><div>AT* on brass</div><div>NP*</div><div>BS</div></div></div> <div><div>Powder Coat - Standard</div><div><div>BZ</div><div>DG</div><div>WI</div><div>SB</div><div>FB</div></div></div> <div><div>Powder Coat - Specialty</div><div><div>WG</div><div>FW</div><div>AL</div></div></div> <div><div>Composites</div><div><div>CB</div><div>DT</div></div></div> | |

ORDERING EXAMPLE: ▶ PD-2LED-CB = FIXTURE-LED-FINISH

| SPECIFICATIONS | 2 LED |
|---------------------------------|---------|
| HALOGEN LUMEN OUTPUT EQUIVALENT | 10 watt |
| WATTS USED/VA TOTAL | 4.0/4.8 |
| MAX LUMENS | 26 |

NOTE: Useful LED Life L70 (Avg): 50,000 hrs. Input Voltage: 10 to 15 V.

* May require longer lead time

INTERACTIVE
TABLE OF CONTENTS

FINISHES

LUXOR ZDC

LUXOR CONTROLLERS

ZD MR-16 LAMPS

LUXOR CUBE

POWER CONTROLLERS

INTEGRATED LED

- ACCENT LIGHTS
- PATH & AREA LIGHTS
- WALL LIGHTS
- DOWN LIGHTS
- IN-GRADE/WELL/
SPECIALTY LIGHTS

STANDARD BASES

- ACCENT LIGHTS
- PATH & AREA LIGHTS
- WALL LIGHTS
- DOWN LIGHTS
- IN-GRADE/WELL LIGHTS

ACCESSORIES

WARRANTY

CP



DIMENSIONS

Height: 3.5"/8.9 cm
Width: 5"/12.7 cm
Depth: 3.875"/9.84 cm
Lead length: 10'/3 m














UN



DIMENSIONS

Height: 3.5"/8.9 cm
Width: 5"/12.7 cm
Depth: 3.875"/9.84 cm
Lead length: 10'/3 m















The CP is a compact wall light engineered to functionally and aesthetically illuminate walkways, stairways, and decks.

| DESCRIPTION | CODE |
|---|---|
| FIXTURE | CP |
| LUXOR OPTION | ZD |
| LEDs | 1LED |
| FINISHES | |
| Metals | |
|  |  |
|  |  |
| Powder Coat - Standard | |
|  |  |
|  |  |
|  |  |
| Powder Coat - Specialty | |
|  |  |
|  | |

ORDERING EXAMPLE: ▶ CP-1LED-CU = FIXTURE-LED-FINISH

| SPECIFICATIONS | 1 LED |
|---------------------------------|---------|
| HALOGEN LUMEN OUTPUT EQUIVALENT | 10 watt |
| WATTS USED/VA TOTAL | 2.0/2.4 |
| MAX LUMENS | 4 |

The UN is a compact wall light with a wide array of finish options, making it a great solution for any compact wall light need.

| DESCRIPTION | CODE |
|---|---|
| FIXTURE | UN |
| LUXOR OPTION | ZD |
| LEDs | 1LED |
| FINISHES | |
| Metals | |
|  |  |
|  |  |
| Powder Coat - Standard | |
|  |  |
|  |  |
|  |  |
| Powder Coat - Specialty | |
|  |  |
| Composites | |
|  |  |

ORDERING EXAMPLE: ▶ UN-1LED-CB = FIXTURE-LED-FINISH

| SPECIFICATIONS | 1 LED |
|---------------------------------|---------|
| HALOGEN LUMEN OUTPUT EQUIVALENT | 10 watt |
| WATTS USED/VA TOTAL | 2.0/2.4 |
| MAX LUMENS | 11 |

NOTE: Useful LED Life L70 (Avg): 50,000 hrs. Input Voltage: 10 to 15 V.

* May require longer lead time

INTERACTIVE
TABLE OF CONTENTS

FINISHES

LUXOR ZDC

LUXOR CONTROLLERS

ZD MR-16 LAMPS

LUXOR CUBE

POWER CONTROLLERS

INTEGRATED LED

- ACCENT LIGHTS
- PATH & AREA LIGHTS
- WALL LIGHTS
- DOWN LIGHTS
- IN-GRADE/WELL/
SPECIALTY LIGHTS

STANDARD BASES

- ACCENT LIGHTS
- PATH & AREA LIGHTS
- WALL LIGHTS
- DOWN LIGHTS
- IN-GRADE/WELL LIGHTS

ACCESSORIES

WARRANTY

PO















DIMENSIONS

Height: 3.5"/13 cm
Diameter: 1.5" conduit
Lead length: 10'/3 m

The PO emits glare-free illumination that provides both comfort and safety. It is available in four unique shapes for maximum design flexibility.

| DESCRIPTION | CODE |
|--------------|--|
| FIXTURE | PO |
| LUXOR OPTION | ZD |
| LEDs | 1LED |
| FACEPLATE | ST (Spot), RD (Round), SQ (Square), WW (Wall Wash) |

| Metals | | | | Powder Coat - Standard | | | | | Powder Coat - Specialty | | |
|---|--|---|---|---|---|---|---|---|---|---|---|
|  |  |  |  |  |  |  |  |  |  |  |  |
| AB* | AT* | NP* | BS | BZ | DG | WI | SB | FB | WG | FW | AL |
| on brass | | | | | | | | | | | |

ORDERING EXAMPLE: ▶ **PO-1LED-ST-BZ** = FIXTURE-LED-FACEPLATE-FINISH

| SPECIFICATIONS | 1 LED |
|---------------------------------|---------|
| HALOGEN LUMEN OUTPUT EQUIVALENT | 10 watt |
| WATTS USED/VA TOTAL | 2.0/2.4 |
| MAX LUMENS | 52 |

MO



DIMENSIONS


Height: 3.5"/13 cm
Diameter: 2" Conduit
Lead length: 10'/3 m


The MO offers the same stylish looks and frosted glow of the PO in a larger 3 LED for more light output. It is the only 20 watt equivalent wall light compatible with the Luxor® system.


| DESCRIPTION | CODE |
|--------------|--|
| FIXTURE | MO |
| LUXOR OPTION | ZD, ZDC (Color)* |
| LEDs | 1LED, 3LED, [Blank]* |
| FACEPLATE | ST (Spot), RD (Round), SQ (Square), WW (Wall Wash) |


FINISHES

Metals










AB*
on brass


AT*
on brass


NP*


BS


Powder Coat - Standard











BZ


DG


WI


SB


FB

Powder Coat - Specialty









WG

FW

AL

SV

ORDERING EXAMPLE: ▶ **PO-1LED-ST-BZ** = FIXTURE-LED-FACEPLATE-FINISH

| SPECIFICATIONS | 1 LED | 3 LED | ZDC |
|---------------------------------|---------|---------|-----------|
| HALOGEN LUMEN OUTPUT EQUIVALENT | 10 watt | 20 watt | 10 watt |
| WATTS USED/VA TOTAL | 2.0/2.4 | 4.2/4.5 | 6.0 / 7.2 |
| MAX LUMENS | 35 | 83 | 60 |

 ZDC capable fixture

† Fixtures specified with ZDC Technology™ are available only in one circuit board configuration. Do not specify a number of LEDs when ordering.

→ INTERACTIVE
TABLE OF CONTENTS

FINISHES

LUXOR ZDC

LUXOR CONTROLLERS

ZD MR-16 LAMPS

LUXOR CUBE

POWER CONTROLLERS

INTEGRATED LED

ACCENT LIGHTS
PATH & AREA LIGHTS
WALL LIGHTS
DOWN LIGHTS
IN-GRADE/WELL/
SPECIALTY LIGHTS

STANDARD BASES

ACCENT LIGHTS
PATH & AREA LIGHTS
WALL LIGHTS
DOWN LIGHTS
IN-GRADE/WELL LIGHTS

ACCESSORIES

WARRANTY

LED Down Lights

DESIGNED TO
HIGHLIGHT

FX Luminaire LED down lights provide endless opportunities to efficiently mimic natural moonlight. They can also serve practical purposes when hung or mounted above tables, barbecues, and seating areas.

INTERACTIVE
TABLE OF CONTENTS

FINISHES

LUXOR ZDC

LUXOR CONTROLLERS

ZD MR-16 LAMPS

LUXOR CUBE

POWER CONTROLLERS

INTEGRATED LED

ACCENT LIGHTS

PATH & AREA LIGHTS

WALL LIGHTS

DOWN LIGHTS

IN-GRADE/WELL/
SPECIALTY LIGHTS

STANDARD BASES

ACCENT LIGHTS

PATH & AREA LIGHTS

WALL LIGHTS

DOWN LIGHTS


IN-GRADE/WELL LIGHTS

ACCESSORIES

WARRANTY

NL

Copper
Sleeve †



DIMENSIONS

Overall height: 3.3"/8.4 cm
Exposed width: 3.2"/8.1 cm
Depth: 3.4"/8.6 cm

PS



Copper
Sleeve †



Optional
Hanging Braket



DIMENSIONS

Overall diameter: 3.2"/8.1 cm
Exposed height: 3.3"/8.4 cm

The NL is designed to seamlessly blend into fine outdoor architectural structures and illuminate them with soft, yet functional LED efficiency.

| DESCRIPTION | CODE |
|--------------|----------------------------------|
| FIXTURE | NL |
| LUXOR OPTION | ZD, ZDC (Color)* |
| LEDs | 1LED, 3LED, 6LED, 9LED, [Blank]* |

| FINISHES | | | | | | |
|-------------------------|---------------------|--------------------|--------------------|-----|----|----|
| Metals | | | | | | |
| | | | | | | |
| CU-AB* on copper | CU-AT* on copper | BS-AB* on brass | BS-AT* on brass | NP* | CU | BS |
| Powder Coat - Standard | | | | | | |
| | | | | | | |
| BZ | DG | WI | SB | FB | WG | FW |
| Powder Coat - Specialty | | | | | | |
| | | | | | | |
| AL | | | | | | |

ORDERING EXAMPLE: ▶ NL-3LED-CU-AB = FIXTURE-LED-FINISH

| SPECIFICATIONS | 1 LED | 3 LED | 6 LED | 9 LED | ZDC |
|---------------------------------|---------|---------|-----------|-----------|----------|
| HALOGEN LUMEN OUTPUT EQUIVALENT | 10 watt | 20 watt | 35 watt | 50 watt | 50 watt |
| WATTS USED/VA TOTAL | 2.0/2.4 | 4.2/4.5 | 10.1/13.5 | 11.2/13.5 | 9.1/11.0 |
| MAX LUMENS | 66 | 202 | 367 | 398 | 173 |

The PS blends beautifully with its surroundings to complement the architectural style of any home, while providing dramatic accents and LED efficiency.

| DESCRIPTION | CODE |
|------------------------|----------------------------------|
| FIXTURE | PS |
| LUXOR OPTION | ZD, ZDC (Color)* |
| LEDs | 1LED, 3LED, 6LED, 9LED, [Blank]* |
| HANGING BRACKET OPTION | HB (Powder coat colors only) |

| FINISHES | | | | | | |
|-------------------------|---------------------|--------------------|--------------------|-----|----|----|
| Metals | | | | | | |
| | | | | | | |
| CU-AB* on copper | CU-AT* on copper | BS-AB* on brass | BS-AT* on brass | NP* | CU | BS |
| Powder Coat - Standard | | | | | | |
| | | | | | | |
| BZ | DG | WI | SB | FB | WG | FW |
| Powder Coat - Specialty | | | | | | |
| | | | | | | |
| AL | | | | | | |

ORDERING EXAMPLE: ▶ PS-ZD-6LED-BZ = FIXTURE-ZD OPTION-LED-FINISH

| SPECIFICATIONS | 1 LED | 3 LED | 6 LED | 9 LED | ZDC |
|---------------------------------|---------|---------|-----------|-----------|----------|
| HALOGEN LUMEN OUTPUT EQUIVALENT | 10 watt | 20 watt | 35 watt | 50 watt | 50 watt |
| WATTS USED/VA TOTAL | 2.0/2.4 | 4.2/4.5 | 10.1/13.5 | 11.2/13.5 | 9.1/11.0 |
| MAX LUMENS | 66 | 202 | 367 | 398 | 173 |

NOTE: Useful LED Life L70 (Avg): 50,000 hrs. Input Voltage: 10 to 15 V.

* May require longer lead time † Copper sleeve included with CU-AB, CU-AT, and CU finishes ZDC capable fixture
† Fixtures specified with ZDC Technology™ are available only in one circuit board configuration. Do not specify a number of LEDs when ordering.

INTERACTIVE
TABLE OF CONTENTS

FINISHES

LUXOR ZDC

LUXOR CONTROLLERS

ZD MR-16 LAMPS

LUXOR CUBE

POWER CONTROLLERS

INTEGRATED LED

- ACCENT LIGHTS
- PATH & AREA LIGHTS
- WALL LIGHTS
- DOWN LIGHTS
- IN-GRADE/WELL/
SPECIALTY LIGHTS

STANDARD BASES

- ACCENT LIGHTS
- PATH & AREA LIGHTS
- WALL LIGHTS
- DOWN LIGHTS
- IN-GRADE/WELL LIGHTS

ACCESSORIES

WARRANTY










JB



DIMENSIONS

Height: 8.9"/22.6 cm
Diameter: 2.4"/5.9 cm

The JB is FX Luminaire’s original LED down light. This fixture solves the problem of changing lamps in complicated areas by providing long-life LEDs.

| DESCRIPTION | CODE | | | | | | | |
|---|--|---|---|---|---|---|---|--|
| FIXTURE | JB | | | | | | | |
| LUXOR OPTION | ZD, ZDC (Color)* | | | | | | | |
| LEDs | 1LED, 3LED, [Blank]* | | | | | | | |
| WALL MOUNT OPTION | WM | | | | | | | |
| FINISHES | | | | | | | | |
| Powder Coat - Standard | | | | | Powder Coat - Specialty | | | <div><div>6</div><div></div><div>JB-3LED-BZ</div></div> |
|  |  |  |  |  |  |  |  | |
| BZ | DG | WI | SB | FB | WG | FW | AL | |
| | | | | | | | | |

ORDERING EXAMPLE: ▶ JB-1LED-FB = FIXTURE-LED-FINISH

| SPECIFICATIONS | 1 LED | 3LED | ZDC |
|---------------------------------|---------|---------|-----------|
| HALOGEN LUMEN OUTPUT EQUIVALENT | 10 watt | 20 watt | 10 watt |
| WATTS USED/VA TOTAL | 2.0/2.4 | 4.2/4.5 | 6.0 / 7.2 |
| MAX LUMENS | 50 | 127 | 69 |










DE



DIMENSIONS

Height: 9.7"/24.6 cm
Diameter: 3"/7.6 cm

The DE is a purpose-built down light that allows for up to 9LED output. Whether placed in a tight space, or out in the open, the DE is a fine addition to any landscape.

| DESCRIPTION | CODE | | | | | | | |
|---|--|---|---|---|---|---|---|---|
| FIXTURE | DE | | | | | | | |
| LUXOR OPTION | ZD, ZDC (Color)* | | | | | | | |
| LEDs | 1LED, 3LED, 6LED, 9LED, [Blank]* | | | | | | | |
| WALL MOUNT OPTION | WM | | | | | | | |
| FINISHES | | | | | | | | |
| Powder Coat - Standard | | | | | Powder Coat - Specialty | | | <div> DE-6LED-BZ</div> |
|  |  |  |  |  |  |  |  | |
| BZ | DG | WI | SB | FB | WG | FW | AL | |
| | | | | | | | | |

ORDERING EXAMPLE: ▶ DE-6LED-WM-BZ = FIXTURE-LED-WALL MOUNT-FINISH

| SPECIFICATIONS | 1 LED | 3 LED | 6LED | 9LED | ZDC |
|---------------------------------|---------|---------|-----------|-----------|----------|
| HALOGEN LUMEN OUTPUT EQUIVALENT | 10 watt | 20 watt | 40watt | 50 watt | 20 watt |
| WATTS USED/VA TOTAL | 2.0/2.4 | 4.2/4.5 | 10.1/13.5 | 11.2/13.5 | 9.1/11.0 |
| MAX LUMENS | 59 | 162 | 328 | 334 | 93 |

NOTE: Useful LED Life L70 (Avg): 50,000 hrs. Input Voltage: 10 to 15 V.

ZDC capable fixture
+ Fixtures specified with ZDC Technology™ are available only in one circuit board configuration. Do not specify a number of LEDs when ordering.

INTERACTIVE
TABLE OF CONTENTS

FINISHES

LUXOR ZDC

LUXOR CONTROLLERS

ZD MR-16 LAMPS

LUXOR CUBE

POWER CONTROLLERS

INTEGRATED LED

- ACCENT LIGHTS
PATH & AREA LIGHTS
WALL LIGHTS
DOWN LIGHTS
IN-GRADE/WELL/
SPECIALTY LIGHTS

STANDARD BASES

- ACCENT LIGHTS
PATH & AREA LIGHTS
WALL LIGHTS
DOWN LIGHTS
IN-GRADE/WELL LIGHTS

ACCESSORIES

WARRANTY

LE
















DIMENSIONS

Overall height: 3.3"/8.3 cm
Exposed diameter: 1.6"/4.1 cm

The LE is a compact hanging down light designed to illuminate a space from above without the need for a large mount.

| DESCRIPTION | CODE |
|--------------|------|
| FIXTURE | LE |
| LUXOR OPTION | ZD |
| LEDs | 1LED |

| FINISHES | | | | | | | | | | | | |
|---|--|---|---|---|---|---|---|---|---|---|---|---|
| Metals | | | | Powder Coat - Standard | | | | | Powder Coat - Specialty | | |  LE-1LED-BZ |
|  |  |  |  |  |  |  |  |  |  |  |  | |
| AB* on copper | AT* on copper | NP* | CU | BZ | DG | WI | SB | FB | WG | FW | AL | |

ORDERING EXAMPLE: ▶ LE-1LED-AB = FIXTURE-LED-FINISH

| SPECIFICATIONS | 1 LED |
|---------------------------------|---------|
| HALOGEN LUMEN OUTPUT EQUIVALENT | 10 watt |
| WATTS USED/VA TOTAL | 2.0/2.4 |
| MAX LUMENS | 55 |

VE
















DIMENSIONS

Height: 3.3"/8.3 cm
Diameter: 1.6"/4.1 cm


The VE is a larger version of the LE, with 1 or 3 LED and an optional perforated sleeve.

| DESCRIPTION | CODE |
|--------------------------|----------------------|
| FIXTURE | VE |
| LUXOR OPTION | ZD, ZDC (Color)* |
| LEDs | 1LED, 3LED, [Blank]* |
| PERFORATED SLEEVE OPTION | PS |

| FINISHES | | | | | | | | | | | | |
|---|--|---|---|---|---|---|---|---|---|---|---|---|
| Metals | | | | Powder Coat - Standard | | | | | Powder Coat - Specialty | | |  VE-3LED-BZ |
|  |  |  |  |  |  |  |  |  |  |  |  | |
| AB* on copper | AT* on copper | NP* | CU | BZ | DG | WI | SB | FB | WG | FW | AL | |

ORDERING EXAMPLE: ▶ VE-1LED-FB = FIXTURE-LED-FINISH

| SPECIFICATIONS | 1 LED | 3LED | ZDC |
|---------------------------------|---------|---------|-----------|
| HALOGEN LUMEN OUTPUT EQUIVALENT | 10 watt | 20 watt | 10 watt |
| WATTS USED/VA TOTAL | 2.0/2.4 | 4.2/4.5 | 6.0 / 7.2 |
| MAX LUMENS | 55 | 162 | 130 |

* May require longer lead time † Copper sleeve included with CU-AB, CU-AT and CU finishes  ZDC capable fixture
† Fixtures specified with ZDC Technology™ are available only in one circuit board configuration. Do not specify a number of LEDs when ordering.

FINISHES

LUXOR ZDC

LUXOR CONTROLLERS

ZD MR-16 LAMPS

LUXOR CUBE

POWER CONTROLLERS

INTEGRATED LED

- ACCENT LIGHTS
- PATH & AREA LIGHTS
- WALL LIGHTS
- DOWN LIGHTS
- IN-GRADE/WELL/
SPECIALTY LIGHTS

STANDARD BASES

- ACCENT LIGHTS
- PATH & AREA LIGHTS
- WALL LIGHTS
- DOWN LIGHTS
- IN-GRADE/WELL LIGHTS

ACCESSORIES

WARRANTY

LED Specialty Lights

DESIGNED
TO BEAUTIFY

Our LED specialty lights were developed to provide efficient, versatile solutions for niche applications and specialized effects. They can also provide designers with new opportunities to enhance landscape details.

INTERACTIVE
TABLE OF CONTENTS

FINISHES

LUXOR ZDC

LUXOR CONTROLLERS

ZD MR-16 LAMPS

LUXOR CUBE

POWER CONTROLLERS

INTEGRATED LED

- ACCENT LIGHTS
- PATH & AREA LIGHTS
- WALL LIGHTS
- DOWN LIGHTS
- IN-GRADE/WELL/
SPECIALTY LIGHTS

STANDARD BASES

- ACCENT LIGHTS
- PATH & AREA LIGHTS
- WALL LIGHTS
- DOWN LIGHTS
- IN-GRADE/WELL LIGHTS

ACCESSORIES

WARRANTY



PE



DIMENSIONS

Overall height: 9.1"/23.1 cm
Exposed diameter: 6"/15.2 cm

The PE’s low profile allows it to be concealed in even the sparsest landscapes to keep the focus where it’s needed.

| DESCRIPTION | | CODE |
|--|--|----------------------------|
| FIXTURE | | PE |
| LUXOR OPTION | | ZD, ZDC (Color)* |
| LEDs | | 3LED, 6LED, 9LED, [Blank]† |
| GRATE | | RG (Ring), CW (Cowling) |
| FINISH | | |
| Composite  CB | User Installed Options (order separately) | |
| | Item | Description |
| |  760700 | PE Grid |

ORDERING EXAMPLE: ▶ PE-3LED-RG-CB = FIXTURE-LED-GRATE-FINISH

| SPECIFICATIONS | 3 LED | 6 LED | 9 LED | ZDC |
|---------------------------------|---------|-----------|-----------|----------|
| HALOGEN LUMEN OUTPUT EQUIVALENT | 20 watt | 35 watt | 50 watt | 20 watt |
| WATTS USED/VA TOTAL | 4.2/4.5 | 10.1/13.5 | 11.2/13.5 | 9.1/11.0 |
| MAX LUMENS | 127 | 264 | 320 | 110 |

KG



DIMENSIONS

Height: 8.9"/22.6 cm
Diameter: 2.4"/5.9 cm

The KG subterranean fixture has a low-profile flat metal top in a variety of color options. The LED module inside can be aimed to highlight any feature for dramatic special effects.

| DESCRIPTION | | CODE |
|-----------------|--|----------------------------|
| FIXTURE | | KG |
| LUXOR OPTION | | ZD, ZDC (Color)* |
| LEDs | | 3LED, 6LED, 9LED, [Blank]† |
| FINISHES | | |
| Metals | | Powder Coat - Standard |
| | | |
| AB* on brass | | WG |
| AT* on brass | | FW |
| NP* | | AL |

ORDERING EXAMPLE: ▶ KG-9LED-BS = FIXTURE-LED-FINISH

| SPECIFICATIONS | 3 LED | 6 LED | 9 LED | ZDC |
|---------------------------------|---------|-----------|-----------|----------|
| HALOGEN LUMEN OUTPUT EQUIVALENT | 20 watt | 35 watt | 50 watt | 20 watt |
| WATTS USED/VA TOTAL | 4.2/4.5 | 10.1/13.5 | 11.2/13.5 | 9.1/11.0 |
| MAX LUMENS | 127 | 264 | 320 | 123 |

NOTE: Useful LED Life L70 (Avg): 50,000 hrs. Input Voltage: 10 to 15 V.

* May require longer lead time  ZDC capable fixture

† Fixtures specified with ZDC Technology™ are available only in one circuit board configuration. Do not specify a number of LEDs when ordering.

INTERACTIVE
TABLE OF CONTENTS

FINISHES

LUXOR ZDC

LUXOR CONTROLLERS

ZD MR-16 LAMPS

LUXOR CUBE

POWER CONTROLLERS

INTEGRATED LED

- ACCENT LIGHTS
- PATH & AREA LIGHTS
- WALL LIGHTS
- DOWN LIGHTS
- IN-GRADE/WELL/
SPECIALTY LIGHTS

STANDARD BASES

- ACCENT LIGHTS
- PATH & AREA LIGHTS
- WALL LIGHTS
- DOWN LIGHTS
- IN-GRADE/WELL LIGHTS

ACCESSORIES

WARRANTY

FC














DIMENSIONS

Height: 9.7"/24.6 cm
Diameter: 4"/10.2 cm

The FC well light features an innovative installation sleeve for easy removal and adjustments. It has three grate options and is available with ZD Technology for Luxor-based systems.

| DESCRIPTION | CODE |
|--------------|---|
| FIXTURE | FC |
| LUXOR OPTION | ZD, ZDC (<i>Color</i>)* |
| LEDs | 1LED, 3LED, 6LED, 9LED, [Blank]* |
| GRATE | LV (Louver) , RG (Ring), CW (Cowling), GW-### (Ground Wash: 090°, 180°, 270°, 360°) |

| FINISHES | | | | | | | | | | | |
|---|--|---|---|---|---|---|---|---|---|---|--|
| Metals | | | Powder Coat - Standard | | | | | Powder Coat - Specialty | | | |
|  |  |  |  |  |  |  |  |  |  |  | |
| AB* on brass | AT* on brass | NP* | BZ | DG | WI | SB | FB | WG | FW | AL | |

→ INTERACTIVE
TABLE OF CONTENTS

FINISHES

LUXOR ZDC

LUXOR CONTROLLERS

ZD MR-16 LAMPS

LUXOR CUBE

POWER CONTROLLERS

INTEGRATED LED

- ACCENT LIGHTS
- PATH & AREA LIGHTS
- WALL LIGHTS
- DOWN LIGHTS
- IN-GRADE/WELL/
SPECIALTY LIGHTS

STANDARD BASES

- ACCENT LIGHTS
- PATH & AREA LIGHTS
- WALL LIGHTS
- DOWN LIGHTS
- IN-GRADE/WELL LIGHTS

ACCESSORIES

WARRANTY


BQ



DIMENSIONS

Arm Length: 24"/61.0 cm
Base Diameter: 3.6"/9.4 cm

The BQ 1 LED barbeque light illuminates grilling areas. It is designed to attach to counters and be integrated into the Luxor system or operated independently with a transformer option.

| DESCRIPTION | CODE |
|---|------|
| FIXTURE | BQ |
| LUXOR OPTION | ZD |
| LEDs | 1LED |
| FINISHES | |
| Metals | |
|  | |
| SS | |

ORDERING EXAMPLE: ▶ **BQ-1LED-SS** = FIXTURE-LED-FINISH

| SPECIFICATIONS | 1 LED |
|---------------------------------|---------|
| HALOGEN LUMEN OUTPUT EQUIVALENT | 10 watt |
| WATTS USED/VA TOTAL | 4.2/4.5 |
| MAX LUMENS | 81.5 |



FINISHES

LUXOR ZDC

LUXOR CONTROLLERS

ZD MR-16 LAMPS

LUXOR CUBE

POWER CONTROLLERS

INTEGRATED LED

ACCENT LIGHTS

PATH & AREA LIGHTS

WALL LIGHTS

DOWN LIGHTS

IN-GRADE/WELL/
SPECIALTY LIGHTS

STANDARD BASES

ACCENT LIGHTS

PATH & AREA LIGHTS

WALL LIGHTS

DOWN LIGHTS

IN-GRADE/WELL LIGHTS

ACCESSORIES

WARRANTY

Standard Base Accent Lights

DESIGNED
TO ENLIVEN

Use the warmth of FX incandescent up lights to accent featured plants, add visual interest, and highlight stonework or sculpture. Choose from powder coated, brass, and copper finishes to complement the setting.

INTERACTIVE
TABLE OF CONTENTS

FINISHES

LUXOR ZDC

LUXOR CONTROLLERS

ZD MR-16 LAMPS

LUXOR CUBE

POWER CONTROLLERS

INTEGRATED LED

- ACCENT LIGHTS
PATH & AREA LIGHTS
WALL LIGHTS
DOWN LIGHTS
IN-GRADE/WELL/
SPECIALTY LIGHTS

STANDARD BASES

- ACCENT LIGHTS
PATH & AREA LIGHTS
WALL LIGHTS
DOWN LIGHTS
IN-GRADE/WELL LIGHTS

ACCESSORIES

WARRANTY










MP



DIMENSIONS

Height: 5"/12.7 cm
Diameter: 1.63"/4.1 cm
Lamp: MR-11
Material: Aluminum Alloy

Being the smallest scale up light in the FX Luminaire family, the MP is an excellent choice for illuminating small garden elements such as dwarf trees or statuary. Its tiny size will hide seamlessly among plants or boulders to keep the lighting source a secret.

| DESCRIPTION | CODE | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| FIXTURE | MP | | | | | | | |
| LAMP | NL (No lamp), 20 (Halogen) | | | | | | | |
| FINISHES | | | | | | | | |
| Powder Coat - Standard | | | | | Powder Coat - Specialty | | | <div><div>6</div><div>MP-20-BZ</div></div> |
|  |  |  |  |  |  |  |  | |
| BZ | DG | WI | SB | FB | WG | FW | AL | |
| | | | | | | | | |

ORDERING EXAMPLE: MP-20-DG = MP - HALOGEN 20W LAMP - DESERT GRANITE FINISH










RS



DIMENSIONS

Height: 6.5"/16.5 cm
- Long Shield: 7.83"/19.88 cm
Diameter: 2.4"/6.1 cm
Lamp: MR-16
Material: Zinc/Aluminum Alloy

This is a rugged up light that provides the power and control of the MR-16 lamp family. It is a precision lighting instrument that eliminates the potentially troublesome threads and screws found in other spotlights.

| DESCRIPTION | CODE | | | | | | | |
|---|---|---|---|---|---|---|---|--|
| FIXTURE | RS | | | | | | | |
| LAMP | NL (No lamp), 10, 20, 35, 50 (Halogen) | | | | | | | |
| LENS OPTION | F (Frosted) | | | | | | | |
| SHIELD OPTION | LS (Long shield) | | | | | | | |
| FINISHES | | | | | | | | |
| Powder Coat - Standard | | | | | Powder Coat - Specialty | | | <div><div>6</div><div></div><div>RS-NL-BZ</div></div> |
|  |  |  |  |  |  |  |  | |
| BZ | DG | WI | SB | FB | WG | FW | AL | |
| | | | | | | | | |

ORDERING EXAMPLE: RS-50-LS-SB = RS - HALOGEN 50W LAMP - LONG SHIELD - SEDONA BROWN FINISH










MU



DIMENSIONS

Height: 7.5"/19.1 cm
- Long Shield: 8.68"/ 22.1 cm
Diameter: 2.4"/6.1 cm
Lamp: MR-16
Material: Aluminum Alloy

The most flexible and upgradeable of all FX Luminaire up lights, the MU has a wide variety of accessories. This allows lighting designers to apply sophisticated techniques and fine tune the effect for maximum impact.

| DESCRIPTION | CODE | | | | | | | |
|---|---|---|---|---|---|---|---|--|
| FIXTURE | MU | | | | | | | |
| LAMP | NL (No lamp) , 10, 20, 35, 50 (Halogen) | | | | | | | |
| SHIELD OPTION | LS (Long Shield) | | | | | | | |
| FINISHES | | | | | | | | |
| Powder Coat - Standard | | | | | Powder Coat - Specialty | | | <div><div><div>6</div><div></div></div><div></div><div>RS-NL-BZ</div></div> |
|  |  |  |  |  |  |  |  | |
| BZ | DG | WI | SB | FB | WG | FW | AL | |
| | | | | | | | | |

ORDERING EXAMPLE: MU-35-BZ = MU - HALOGEN 35W LAMP - BRONZE METALLIC FINISH

INTERACTIVE
TABLE OF CONTENTS

FINISHES

LUXOR ZDC

LUXOR CONTROLLERS

ZD MR-16 LAMPS

LUXOR CUBE

POWER CONTROLLERS

INTEGRATED LED

- ACCENT LIGHTS
PATH & AREA LIGHTS
WALL LIGHTS
DOWN LIGHTS
IN-GRADE/WELL/
SPECIALTY LIGHTS

STANDARD BASES

- ACCENT LIGHTS
PATH & AREA LIGHTS
WALL LIGHTS
DOWN LIGHTS
IN-GRADE/WELL LIGHTS

ACCESSORIES

WARRANTY

LO



DIMENSIONS

Height: 6"/15.24 cm
Diameter: 2.25"/5.72 cm
Lamp: MR-16
Material: Brass

The LO, designed for the project owner who never compromises, is milled from solid billet brass to aerospace tolerance. Its pristine design and unmatched durability allow the LO to enhance a landscape during the day and at night.

| DESCRIPTION | CODE |
|--|---|
| FIXTURE | LO |
| LAMP | NL (No lamp) , 10, 20, 35, 50 (Halogen) |
| FINISHES | |
| Metals | |
|  BS |  NP* |

ORDERING EXAMPLE: **LO-20-BS** = LO - HALOGEN 20W LAMP - BRASS FINISH



LR



DIMENSIONS

Height: 6"/15.2 cm
– Long Shield: 7.5"/19.1 cm
Diameter: 2.4"/6.1 cm
Lamp: MR-16
Material: Copper/Brass

Engineered for those who want to make a lasting investment in their garden, the LR is without peer. This rugged luminaire provides the power and control of the Halogen MR-16 lamp family.

| DESCRIPTION | CODE |
|--|---|
| FIXTURE | LR |
| LAMP | NL (No lamp), 10, 20, 35, 50 (Halogen) |
| SHIELD OPTION | GS (Glare shield) |
| FINISHES | |
| Metals | |
|  CU |  NP* |

ORDERING EXAMPLE: **LR-35-CU** = LR - HALOGEN 35W LAMP - COPPER FINISH









SI



DIMENSIONS

Height: 6.5"/16.5 cm
– Long Shield: 7.83"/19.88 cm
Diameter: 2.4"/6.1 cm
Lamp: T3
Material: Zinc/Aluminum Alloy

The SI fills the need for a more subtle light source. It offers the long life benefit of a halogen lamp without overpowering the space with light. The bi-pin lamp in the SI provides an even, neutral color.

| DESCRIPTION | CODE |
|--|--|
| FIXTURE | SI |
| LAMP | NL (No lamp), 5, 10, 20, 35 (Halogen) |
| LENS OPTION | F (Frosted) |
| SHIELD OPTION | LS (Long shield) |
| FINISHES | |
| Powder Coat - Standard | |
|  BZ |  DG |
|  WI |  SB |
|  FB |  WG |
|  FW |  AL |

ORDERING EXAMPLE: **SI-20-F-SB** = SI - HALOGEN 20W LAMP - FROSTED LENS - SEDONA BROWN FINISH

* May require longer lead time

➔ INTERACTIVE
TABLE OF CONTENTS

FINISHES

LUXOR ZDC

LUXOR CONTROLLERS

ZD MR-16 LAMPS

LUXOR CUBE

POWER CONTROLLERS

INTEGRATED LED

- ACCENT LIGHTS
- PATH & AREA LIGHTS
- WALL LIGHTS
- DOWN LIGHTS
- IN-GRADE/WELL/
SPECIALTY LIGHTS

STANDARD BASES

- ACCENT LIGHTS
- PATH & AREA LIGHTS
- WALL LIGHTS
- DOWN LIGHTS
- IN-GRADE/WELL LIGHTS

ACCESSORIES

WARRANTY











RL



DIMENSIONS

Height: 6.5"/16.5 cm
Diameter: 4"/10.16 cm
Lamp Base: G4
Material: Copper/Brass

The RL gently washes walls, boulders, and architectural elements bringing out fine detail without overpowering a scene. It creates a soft glow that backlights the sculptural shape of the trees, or grazes light over a stone wall.

| DESCRIPTION | CODE |
|--|---|
| FIXTURE | RL |
| LAMP | 10, 20 (Xenon G4), 10H, 20H (Halogen T3) |
| FINISHES | |
| Metals | Powder Coat - Standard |
|  CU |  NP* |
|  BZ |  DG |
|  WI |  SB |
|  FB |  WG |
|  FW |  AL |

ORDERING EXAMPLE: **RL-10H-CU** = RL - HALOGEN 10W LAMP - COPPER FINISH



FINISHES

LUXOR ZDC

LUXOR CONTROLLERS

ZD MR-16 LAMPS

LUXOR CUBE

POWER CONTROLLERS

INTEGRATED LED

- ACCENT LIGHTS
- PATH & AREA LIGHTS
- WALL LIGHTS
- DOWN LIGHTS
- IN-GRADE/WELL/
SPECIALTY LIGHTS

STANDARD BASES

- ACCENT LIGHTS
- PATH & AREA LIGHTS
- WALL LIGHTS
- DOWN LIGHTS
- IN-GRADE/WELL LIGHTS

ACCESSORIES

WARRANTY

Standard Base Path Lights

DESIGNED TO
ILLUMINATE

FX incandescent path lights softly illuminate walkways and create ambiance to highlight landscape features along the way. Choose from a wide array of styles in metal and powder coat finishes to complement any setting.

INTERACTIVE
TABLE OF CONTENTS

FINISHES

LUXOR ZDC

LUXOR CONTROLLERS

ZD MR-16 LAMPS

LUXOR CUBE

POWER CONTROLLERS

INTEGRATED LED

ACCENT LIGHTS

PATH & AREA LIGHTS

WALL LIGHTS

DOWN LIGHTS

IN-GRADE/WELL/
SPECIALTY LIGHTS

STANDARD BASES

ACCENT LIGHTS

PATH & AREA LIGHTS

WALL LIGHTS

DOWN LIGHTS

IN-GRADE/WELL LIGHTS

ACCESSORIES

WARRANTY



SP



DIMENSIONS

Overall height: 15.5"/39.4 cm
Exposed width: 4.7"/11.9 cm
Lamp Base: G4
Material: Copper

The SP is the industry standard and true benchmark of quality. It's a combination of proven quality and unmatched beauty in your garden.

| DESCRIPTION | CODE |
|--|--|
| FIXTURE | SP |
| LAMP | NL (No lamp), 10, 15, 20 (Xenon G4), 10H, 20H (Halogen T3) |
| RISERS (¾") | 8R, 12R, 18R, 24R, 36R (in inches) |
| FINISHES | |
| <div><div>Metals</div><div><div>AB* on copper</div><div>AT* on copper</div><div>NP*</div><div>CU</div></div></div> <div><div>Powder Coat - Standard</div><div><div>BZ</div><div>DG</div><div>WI</div><div>SB</div><div>FB</div></div></div> <div><div>Powder Coat - Specialty</div><div><div>WG</div><div>FW</div><div>AL</div></div></div> <div><div>6</div><div>SP-20-12R-CU</div></div> | |

ORDERING EXAMPLE: SP-20-18R-CU = SP - XENON 20W LAMP - 18" RISER - COPPER FINISH

DL



DIMENSIONS

Height: 16.2"/41.2 cm
(with 12" riser)
Diameter: 6.3"/16 cm
Lamp Base: G4
Material: Copper

The design of the DL offers a timeless look for a variety of settings. Choose from elegant metal finishes or contemporary powder coat colors.

| DESCRIPTION | CODE |
|--|--|
| FIXTURE | DL |
| LAMP | NL (No lamp), 10, 20 (Xenon G4), 10H, 20H (Halogen T3) |
| RISERS (¾") | 8R, 12R, 18R, 24R, 36R (in inches) |
| FINISHES | |
| <div><div>Metals</div><div><div>AB* on copper</div><div>AT* on copper</div><div>CU</div><div>NP*</div></div></div> <div><div>Powder Coat - Standard</div><div><div>BZ</div><div>DG</div><div>WI</div><div>SB</div><div>FB</div></div></div> <div><div>Powder Coat - Specialty</div><div><div>WG</div><div>FW</div><div>AL</div></div></div> <div><div>6</div><div>DL-20-12R-CU</div></div> | |

ORDERING EXAMPLE: DL-10-12R-CU = DL - XENON 10W LAMP - 12" RISER - COPPER FINISH

→ INTERACTIVE
TABLE OF CONTENTS

FINISHES

LUXOR ZDC

LUXOR CONTROLLERS

ZD MR-16 LAMPS

LUXOR CUBE

POWER CONTROLLERS

INTEGRATED LED

- ACCENT LIGHTS
- PATH & AREA LIGHTS
- WALL LIGHTS
- DOWN LIGHTS
- IN-GRADE/WELL/
SPECIALTY LIGHTS


STANDARD BASES

- ACCENT LIGHTS
- PATH & AREA LIGHTS
- WALL LIGHTS
- DOWN LIGHTS
- IN-GRADE/WELL LIGHTS

ACCESSORIES


WARRANTY

PETITE




BD

DIMENSIONS
Overall height: 15.5"/39.4 cm
Exposed width: 4.7"/11.9 cm




EA

DIMENSIONS
Overall height: 15.9"/40.4 cm
Exposed width: 4.7"/11.9 cm




PF

DIMENSIONS
Overall height: 15"/38.1 cm
Exposed width: 5"/12.7 cm




PR

DIMENSIONS
Overall height: 15"/38.1 cm
Exposed width: 3.8"/9.7 cm













SC

DIMENSIONS
Overall height: 15.5"/39.4 cm
Exposed width: 4.7"/11.9 cm



AP

DIMENSIONS
Overall height: 15.5"/38.1 cm
Exposed width: 3.9"/9.9 cm

| DESCRIPTION | CODE |
|--|--|
| FIXTURE | BD, EA, PF, PR, SC, AP |
| LAMP | NL (No lamp), 10, 20 (Xenon G4), 10H, 20H (Halogen T3) |
| RISERS (¾") | 8R, 12R, 18R, 24R, 36R (in inches) |
| FINISHES | |
| <div><div>Metals</div><div><div> CU</div><div> NP*</div></div><div><div>Powder Coat - Standard</div><div><div> BZ</div><div> DG</div><div> WI</div><div> SB</div><div> FB</div></div><div><div>Powder Coat - Specialty</div><div><div> WG</div><div> FW</div><div> AL</div></div></div></div></div> | |

ORDERING EXAMPLE: **BD-20-18R-CU** = BD - XENON 20W LAMP - 18" RISER - SEDONA BROWN FINISH

* May require longer lead time

➔ INTERACTIVE
TABLE OF CONTENTS

FINISHES

LUXOR ZDC

LUXOR CONTROLLERS

ZD MR-16 LAMPS

LUXOR CUBE

POWER CONTROLLERS

INTEGRATED LED

- ACCENT LIGHTS
- PATH & AREA LIGHTS
- WALL LIGHTS
- DOWN LIGHTS
- IN-GRADE/WELL/
SPECIALTY LIGHTS

STANDARD BASES

- ACCENT LIGHTS
- PATH & AREA LIGHTS
- WALL LIGHTS
- DOWN LIGHTS
- IN-GRADE/WELL LIGHTS

ACCESSORIES

WARRANTY

GRANDE



CB

DIMENSIONS

Overall height: 16.2"/41.2 cm
Exposed width: 7.4"/18.8 cm



QF

DIMENSIONS

Overall height: 16.8"/42.7 cm
Exposed width: 7.4"/18.8 cm



DM

DIMENSIONS

Overall height: 16.5"/41.9 cm
Exposed width: 6.3"/16 cm



CV

DIMENSIONS

Overall height: 15.8"/40.1 cm
Exposed width: 7.4"/18.3 cm



CA

DIMENSIONS













Overall height: 16.2"/41.2 cm
Exposed width: 7.4" /18.8 cm



AN

DIMENSIONS

Overall height: 15.3"/38.7 cm
Exposed width: 7.1"/18 cm

| DESCRIPTION | CODE |
|---|---|
| FIXTURE | CB, QF, DM, CV, CA, AN |
| LAMP | NL (No lamp), 10, 20 (Xenon G4), 10H, 20H (Halogen T3) |
| RISERS (¾") | 8R, 12R, 18R, 24R, 36R (in inches) |
| FINISHES | |
| Metals | Powder Coat - Standard |
|  |  |
| CU | NP* |
|  |  |
| BZ | DG |
|  |  |
| WI | SB |
|  |  |
| FB | WG |
|  |  |
| FW | AL |
|   DM-20-12R-CU | |

ORDERING EXAMPLE: CB-10-12R-CU = CB - XENON 10W LAMP - 12" RISER - COPPER FINISH

INTERACTIVE
TABLE OF CONTENTS

FINISHES

LUXOR ZDC

LUXOR CONTROLLERS

ZD MR-16 LAMPS

LUXOR CUBE

POWER CONTROLLERS

INTEGRATED LED

- ACCENT LIGHTS
- PATH & AREA LIGHTS
- WALL LIGHTS
- DOWN LIGHTS
- IN-GRADE/WELL/
SPECIALTY LIGHTS

STANDARD BASES

- ACCENT LIGHTS
- PATH & AREA LIGHTS
- WALL LIGHTS
- DOWN LIGHTS
- IN-GRADE/WELL LIGHTS

ACCESSORIES

WARRANTY

DP



DIMENSIONS

Height: 13.5"/34.3 cm
(with 12" riser)
Diameter: 2.9"/7.37 cm
Lamp Base: G4
Material: Copper

PV



DIMENSIONS

Height: 13.5"/34.3 cm
(with 12" riser)
Diameter: 4"/10.16 cm
Lamp Base: G4
Material: Copper

GN



DIMENSIONS

Height: 22.5"/57.15 cm
(with 18" riser)
Diameter: 10"/25.4 cm
Lamp Base: G4
Material: Copper

The DP, our smallest scale path light, is a great addition to tight garden spaces or urban rooftop gardens. The use of heavy gauge copper and milled billet brass make the DP the perfect mixture of strength and grace.

| DESCRIPTION | CODE |
|-------------|---|
| FIXTURE | DP |
| LAMP | NL (No lamp), 10 (Xenon G4), 10H (Halogen T3) |
| RISERS (½") | 8R, 12R, 18R, 24R (in inches) |
| FINISHES | |
| Metals | Powder Coat - Standard |
| CU | NP* |
| BZ | DG |
| WI | SB |
| FB | WG |
| FW | AL |

ORDERING EXAMPLE: **DP-10H-18R-CU** = DP - HALOGEN 10W LAMP - 18" RISER - COPPER FINISH

For a petite punctuation to any pathway or patio space, the PV is a natural choice. The size and shape of the PV make it a perfect fit for small scale garden arrangements.

| DESCRIPTION | CODE |
|-------------|---|
| FIXTURE | PV |
| LAMP | NL (No lamp), 10 (Xenon G4), 10H (Halogen T3) |
| RISERS (½") | 8R, 12R, 18R, 24R (in inches) |
| FINISHES | |
| Metals | Powder Coat - Standard |
| CU | NP* |
| BZ | DG |
| WI | SB |
| FB | WG |
| FW | AL |

ORDERING EXAMPLE: **PV-10-12R-CU** = PV - XENON 10W LAMP - 12" RISER - COPPER FINISH

The GN has an upscale design and a radiant shine. With numerous finish options the GN is the perfect addition to any property that requires a higher-end, sleek looking path light.

| DESCRIPTION | CODE |
|--------------|--|
| FIXTURE | GN |
| LAMP | NL (No lamp), 20 (Xenon G4), 20H, 35H (Halogen T3) |
| RISERS (1¼") | 12R, 18R, 24R, 36R (in inches) |
| FINISHES | |
| Metals | Powder Coat - Standard |
| CU | NP* |
| BZ | DG |
| WI | SB |
| FB | WG |
| FW | AL |

ORDERING EXAMPLE: **GN-35H-24R-CU** = GN - HALOGEN 35W LAMP - 24" RISER - COPPER FINISH

* May require longer lead time

INTERACTIVE
TABLE OF CONTENTS

FINISHES

LUXOR ZDC

LUXOR CONTROLLERS

ZD MR-16 LAMPS

LUXOR CUBE

POWER CONTROLLERS

INTEGRATED LED

- ACCENT LIGHTS
- PATH & AREA LIGHTS
- WALL LIGHTS
- DOWN LIGHTS
- IN-GRADE/WELL/
SPECIALTY LIGHTS

STANDARD BASES

- ACCENT LIGHTS
- PATH & AREA LIGHTS
- WALL LIGHTS
- DOWN LIGHTS
- IN-GRADE/WELL LIGHTS

ACCESSORIES

WARRANTY

TD



DIMENSIONS

Height: 18"/45.72 cm
XT: 29.5"/ 74.93 cm
Diameter: 5"/12.7 cm
Lamp Base: SCB
Material: Copper

The gentle curves of the TD bring a subtle softness to the landscape. Its slender silhouette is perfect for illuminating winding paths or planters.

| DESCRIPTION | CODE |
|---------------|---------------------------|
| FIXTURE | TD |
| LAMP | 12, 18, 25 (Incandescent) |
| HEIGHT OPTION | XT (Extra Tall) |
| FINISHES | |
| Metals | Powder Coat - Standard |
| CU | NP* |
| BZ | DG |
| WI | SB |
| FB | WG |
| | FW |
| | AL |
| | Powder Coat - Specialty |

ORDERING EXAMPLE: **TD-12-CU** = TD - INCANDESCENT 12W LAMP - COPPER FINISH

FG



DIMENSIONS

Height: 22"/55.88 cm
Diameter: 5.0"/12.7 cm
Lamp Base: SCB
Material: Copper

Designed to be a path light, the FG also lends itself to illuminating flower beds and planters to create unique focal points in the landscape.

| DESCRIPTION | CODE |
|-------------|---------------------------|
| FIXTURE | FG |
| LAMP | 12, 18, 25 (Incandescent) |
| FINISHES | |
| Metals | Powder Coat - Standard |
| CU | NP* |
| BZ | DG |
| WI | SB |
| FB | WG |
| | FW |
| | AL |
| | Powder Coat - Specialty |

ORDERING EXAMPLE: **FG-25-CU** = FG - INCANDESCENT 25W LAMP - COPPER FINISH

AL



DIMENSIONS

Height: 27.5"/69.85 cm
Diameter: 6.0"/15.24 cm
Lamp Base: SCB
Material: Aluminum

The visually delicate AL offers efficient illumination without overpowering garden elements. Various powder coat finishes can complement or contrast the landscape.

| DESCRIPTION | CODE |
|------------------------|---------------------------|
| FIXTURE | AL |
| LAMP | 12, 18, 25 (Incandescent) |
| FINISHES | |
| Powder Coat - Standard | Powder Coat - Specialty |
| BZ | DG |
| WI | SB |
| FB | WG |
| | FW |
| | AL |

ORDERING EXAMPLE: **AL-18-BZ** = AL - INCANDESCENT 18W LAMP - BRONZE METALLIC FINISH

INTERACTIVE
TABLE OF CONTENTS

FINISHES

LUXOR ZDC

LUXOR CONTROLLERS

ZD MR-16 LAMPS

LUXOR CUBE

POWER CONTROLLERS

INTEGRATED LED

- ACCENT LIGHTS
- PATH & AREA LIGHTS
- WALL LIGHTS
- DOWN LIGHTS
- IN-GRADE/WELL/
SPECIALTY LIGHTS

STANDARD BASES

- ACCENT LIGHTS
- PATH & AREA LIGHTS
- WALL LIGHTS
- DOWN LIGHTS
- IN-GRADE/WELL LIGHTS

ACCESSORIES

WARRANTY









DS



DIMENSIONS

Height: 19"/48.26 cm
- 2 Tier: 16"/40.64 cm
Diameter: 6"/15.24 cm
Lamp Base: G4
Material: Aluminum Alloy

The DS is well-suited for high traffic areas where a durable fixture is desired. Based on a design that has been sold for more than half a century, the DS is a down-to-earth and reliable choice.

| DESCRIPTION | CODE | | | | | | |
|---|---|---|---|---|---|---|---|
| FIXTURE | DS | | | | | | |
| LAMP | NL (No lamp), 10, 15, 20 (Xenon G4), 10H, 20H, 35H (Halogen T3) | | | | | | |
| LOW TIER OPTION | 2T (3 Tiers is standard) | | | | | | |
| RISERS (½") | 12R, 18R, 24R, 36R (in inches) | | | | | | |
| FINISHES | | | | | | | |
| Powder Coat - Standard | | | | | Powder Coat - Specialty | | |
|  |  |  |  |  |  |  |  |
| BZ | DG | WI | SB | FB | WG | FW | AL |

ORDERING EXAMPLE: **DS-15-2T-24R-SB** = DS - XENON 15W LAMP - 2 TIER -24" RISER - SEDONA BROWN FINISH









DR



DIMENSIONS

Height: 19"/48.26 cm
- 2 Tier: 16.5"/41.91 cm
Diameter: 10.0"/25.4 cm
Lamp Base: G4
Material: Aluminum Alloy

Designed for medium-scale commercial projects, the DR is tough and durable. The oversized top of the DR directs light downward for controlled illumination without glare.

| DESCRIPTION | CODE | | | | | | |
|---|---|---|---|---|---|---|---|
| FIXTURE | DR | | | | | | |
| LAMP | NL (No lamp), 10, 15, 20 (Xenon G4), 10H, 20H, 35H (Halogen T3) | | | | | | |
| LOW TIER OPTION | 2T (3 Tiers is standard) | | | | | | |
| RISERS (½") | 8R, 12R, 18R, 24R, 36R (in inches) | | | | | | |
| FINISHES | | | | | | | |
| Powder Coat - Standard | | | | | Powder Coat - Specialty | | |
|  |  |  |  |  |  |  |  |
| BZ | DG | WI | SB | FB | WG | FW | AL |

ORDERING EXAMPLE: **DR-20H-36R-SB** = DR - HALOGEN 20W LAMP - 36" RISER -SEDONA BROWN FINISH









PM



DIMENSIONS

Height: 14"/35.56 cm
Diameter: 2.5"/6.35 cm
Lamp: AR-11
Material: Aluminum Alloy

The PM is a refreshing alternative to more traditional path lights. With sleek lines and a slim profile, its design is just right for more contemporary settings or desert landscapes.

| DESCRIPTION | CODE | | | | | | |
|---|---|---|---|---|---|---|---|
| FIXTURE | PM | | | | | | |
| LAMP | 20 (Halogen) | | | | | | |
| FINISHES | | | | | | | |
| Powder Coat - Standard | | | | | Powder Coat - Specialty | | |
|  |  |  |  |  |  |  |  |
| BZ | DG | WI | SB | FB | WG | FW | AL |

ORDERING EXAMPLE: **PM-20-WI** = PM - HALOGEN 20W LAMP - WEATHERED IRON FINISH

INTERACTIVE
TABLE OF CONTENTS

FINISHES

LUXOR ZDC

LUXOR CONTROLLERS

ZD MR-16 LAMPS

LUXOR CUBE

POWER CONTROLLERS

INTEGRATED LED

- ACCENT LIGHTS
PATH & AREA LIGHTS
WALL LIGHTS
DOWN LIGHTS
IN-GRADE/WELL/
SPECIALTY LIGHTS

STANDARD BASES

- ACCENT LIGHTS
PATH & AREA LIGHTS
WALL LIGHTS
DOWN LIGHTS
IN-GRADE/WELL LIGHTS

ACCESSORIES

WARRANTY

GT



DIMENSIONS

Height: 14.5"/36.83 cm
(with 12" riser)
Diameter: 7.4"/18.8 cm
Lamp Base: G4
Material: Copper

On some lighting projects there are challenges that basic fixed-mount path lights cannot meet. The GT is a versatile solution for a variety of installations. As a wall wash, a path light or an up light, the GT provides beam spread adjustability and soft illumination.

| DESCRIPTION | CODE |
|-------------|--|
| FIXTURE | GT |
| LAMP | 10, 20 (Xenon G4), 10H, 20H (Halogen T3) |
| RISERS (1") | 8R, 12R, 18R, 24R, 36R (in inches) |
| FINISHES | |
| Metals | Powder Coat - Standard |
| CU | NP* |
| BZ | DG |
| WI | SB |
| FB | WG |
| FW | AL |
| VF | |

ORDERING EXAMPLE: GT-20H-36R-CU = GT - HALOGEN 20W LAMP - 36" RISER - COPPER FINISH

PL



DIMENSIONS

Height: 15"/38.1 cm
Diameter: 6"/15.2 cm
Material: Aluminum Alloy

The PL offers a warm glow and wide angle for illuminating larger spaces. Aluminum construction allows a high-quality fixture at a value price point.

| DESCRIPTION | CODE |
|------------------------|------------------------------------|
| FIXTURE | PL |
| LAMP | NL (No lamp) |
| RISERS (½") | 8R, 12R, 18R, 24R, 36R (in inches) |
| FINISHES | |
| Powder Coat - Standard | Powder Coat - Specialty |
| BZ | DG |
| WI | SB |
| FB | WG |
| FW | AL |



ORDERING EXAMPLE: PL-NL-36R-SB = DR - NO LAMP - 36" RISER - SEDONA BROWN FINISH

TM



DIMENSIONS

Height: 15"/38.1 cm
Diameter: 5"/12.7 cm
Material: Aluminum Alloy

The TM is sized perfectly to illuminate small to mid-sized landscapes without overwhelming the space. A great value aluminum fixture with high-quality construction.

| DESCRIPTION | CODE |
|------------------------|------------------------------------|
| FIXTURE | TM |
| LAMP | NL (No lamp) |
| RISERS (½") | 8R, 12R, 18R, 24R, 36R (in inches) |
| FINISHES | |
| Powder Coat - Standard | Powder Coat - Specialty |
| BZ | DG |
| WI | SB |
| FB | WG |
| FW | AL |



ORDERING EXAMPLE: TM-NL-18R-SB = PM - NO LAMP - 18" RISER - SEDONA BROWN FINISH

FINISHES

LUXOR ZDC

LUXOR CONTROLLERS

ZD MR-16 LAMPS

LUXOR CUBE

POWER CONTROLLERS

INTEGRATED LED

- ACCENT LIGHTS
- PATH & AREA LIGHTS
- WALL LIGHTS
- DOWN LIGHTS
- IN-GRADE/WELL/
SPECIALTY LIGHTS

STANDARD BASES

- ACCENT LIGHTS
- PATH & AREA LIGHTS
- WALL LIGHTS
- DOWN LIGHTS
- IN-GRADE/WELL LIGHTS

ACCESSORIES

WARRANTY

Standard Base Wall Lights

DESIGNED TO
ACCENTUATE

Incorporate FX incandescent wall lights in your design to increase safety, define perimeters and softly enhance architectural walls and stonework. Choose from a variety of styles to seamlessly integrate into any setting.

INTERACTIVE
TABLE OF CONTENTS

FINISHES

LUXOR ZDC

LUXOR CONTROLLERS

ZD MR-16 LAMPS

LUXOR CUBE

POWER CONTROLLERS

INTEGRATED LED

- ACCENT LIGHTS
- PATH & AREA LIGHTS
- WALL LIGHTS
- DOWN LIGHTS
- IN-GRADE/WELL/
SPECIALTY LIGHTS

STANDARD BASES

- ACCENT LIGHTS
- PATH & AREA LIGHTS
- WALL LIGHTS
- DOWN LIGHTS
- IN-GRADE/WELL LIGHTS

ACCESSORIES

WARRANTY











CP



DIMENSIONS

Height: 3.5"/8.9 cm
Width: 5"/12.7 cm
Depth: 3.875"/9.84 cm
Lamp Base: G4
Material: Copper

The CP is engineered to bring light to walkways, stairways, and decks. The CP is also helpful in lighting paths that do not have an adjacent planter area for path lighting.

| DESCRIPTION | | CODE |
|---|---|---|
| FIXTURE | | CP |
| LAMP | | 10 (Xenon G4), 10H (Halogen T3) |
| FINISHES | | |
| Metals | | Powder Coat - Standard |
|  |  | |
| CU | NP* | |
|  |  |  |
| BZ | DG | WI |
|  |  | |
| SB | FB | |
|  |  |  |
| WG | FW | AL |

EXAMPLE: CP-10-CU = CP - XENON 10W LAMP - COPPER FINISH











LM



DIMENSIONS

Height: 3.5"/8.9 cm
Width: 9"/22.9 cm
Depth: 4"/10.16 cm
Lamp Base: G4
Material: Copper

The LM utilizes the same smart design as the CP with more light output. Use the LM alone or install in conjunction with CP to maintain consistent lighting design style in walls adjacent to walkways or stairways.

| DESCRIPTION | | CODE | | | | | | | |
|---|--|---|---|---|---|---|---|---|---|
| FIXTURE | | LM | | | | | | | |
| LAMP | | 20 (Xenon G4, 2 x 10), 20H (Halogen T3, 2 x 10) | | | | | | | |
| FINISHES | | | | | | | | | |
| Metals | | Powder Coat - Standard | Powder Coat - Specialty | | | | | | |
|  |  |  |  |  |  |  |  |  |  |
| CU | NP* | BZ | DG | WI | SB | FB | WG | FW | AL |

EXAMPLE: LM-20H-CU = LM - HALOGEN 20W LAMP - COPPER FINISH













UN



DIMENSIONS

Height: 3.5"/8.9 cm
Width: 5"/12.7 cm
Depth: 3.875"/9.84 cm
Lamp Base: G4
Material: Brass or Composite

The UN provides all of the great features of the CP with gentler, more organic lines that wash walkways with shadow-free illumination. It is available in both brass and composite material and in an array of powder coat colors.

| DESCRIPTION | | CODE | | | | | | | | | |
|---|--|---|---|---|---|---|---|---|---|---|---|
| FIXTURE | | UN | | | | | | | | | |
| LAMP | | 10 (Xenon G4), 10H (Halogen T3) | | | | | | | | | |
| FINISHES | | | | | | | | | | | |
| Metals | | Powder Coat - Standard | | | Powder Coat - Specialty | | | Composites | | | |
|  |  |  |  |  |  |  |  |  |  |  |  |
| BS | NP* | BZ | DG | WI | SB | FB | WG | FW | AL | CB | DT |

EXAMPLE: UN-10H-CB = UN - HALOGEN 10W LAMP - CAMO BRONZE FINISH

INTERACTIVE
TABLE OF CONTENTS

FINISHES

LUXOR ZDC

LUXOR CONTROLLERS

ZD MR-16 LAMPS

LUXOR CUBE

POWER CONTROLLERS

INTEGRATED LED

- ACCENT LIGHTS
PATH & AREA LIGHTS
WALL LIGHTS
DOWN LIGHTS
IN-GRADE/WELL/
SPECIALTY LIGHTS

STANDARD BASES

- ACCENT LIGHTS
PATH & AREA LIGHTS
WALL LIGHTS
DOWN LIGHTS
IN-GRADE/WELL LIGHTS

ACCESSORIES

WARRANTY

PD



DIMENSIONS

Height: 3.5"/8.9 cm
Width: 9"/22.9 cm
Depth: 4"/10.16 cm
Lamp Base: G4
Material: Brass or Composite

The PD offers a higher level of illumination for those areas where 10 watts is not quite enough. The LevelX system assures that the faceplates of these permanently mounted fixtures will remain perfectly level upon completion of any installation.

| DESCRIPTION | CODE |
|-------------|---|
| FIXTURE | PD |
| LAMP | 20 (Xenon G4, 2 x 10), 20H (Halogen T3, 2 x 10) |
| FINISHES | |
| Metals | Powder Coat - Standard |
| BS | NP* |
| BZ | DG |
| WI | SB |
| FB | WG |
| FW | AL |
| CB | DT |

EXAMPLE: PD-20-CB = PD - XENON 20W LAMP - CAMO BRONZE FINISH

MM



DIMENSIONS

Depth: 1.75"/4.45 cm
Diameter: 3.25"/8.26 cm
Lamp Base: G4
Material: Brass or Aluminum Alloy

The surface mount MM meets the challenge of lighting a walkway where internal wiring is not an option. With surprisingly generous light output, the MM can be used on masonry or wood and is available in brass or powder coat colors.

| DESCRIPTION | CODE |
|-------------|-----------------------------------|
| FIXTURE | MM |
| LAMP | 10, (Xenon G4), 10H, (Halogen T3) |
| FINISHES | |
| Metals | Powder Coat - Standard |
| BS | NP* |
| BZ | DG |
| WI | SB |
| FB | WG |
| FW | AL |
| 6 MM-10-BZ | |

EXAMPLE: MM-10-DG = MM - XENON 10W LAMP - DESERT GRANITE FINISH












BP




DIMENSIONS

Height: 1"/2.54 cm
Width: 6.75"/17.15 cm
Depth: 3.5"/8.89 cm
Lamp Base: G4
Material: Copper, Brass, Steel or Aluminum Alloy

The BP is an under-the-cap masonry wall light with a frosted glass lens for a soft and even illumination. The stainless steel under mount flange is easily sandwiched between the block wall and the top capstone for neat, clean installation.

| DESCRIPTION | CODE |
|---|---|
| FIXTURE | BP |
| LAMP | 10, (Xenon G4), 10H, (Halogen T3) |
| FINISHES | |
| Metals | |
|  |  |
| BS | CU |
| Powder Coat - Standard | |
|  |  |
| SS | BZ |
|  |  |
| DG | WI |
|  |  |
| SB | FB |
| Powder Coat - Specialty | |
|  |  |
| WG | FW |
|  | |
| AL | |



EXAMPLE: BP-10H-SS = BP - HALOGEN 10W LAMP - STAINLESS STEEL FINISH

→ INTERACTIVE
TABLE OF CONTENTS

FINISHES

LUXOR ZDC

LUXOR CONTROLLERS

ZD MR-16 LAMPS

LUXOR CUBE

POWER CONTROLLERS

INTEGRATED LED

- ACCENT LIGHTS
- PATH & AREA LIGHTS
- WALL LIGHTS
- DOWN LIGHTS
- IN-GRADE/WELL/
SPECIALTY LIGHTS

STANDARD BASES

- ACCENT LIGHTS
- PATH & AREA LIGHTS
- WALL LIGHTS
- DOWN LIGHTS
- IN-GRADE/WELL LIGHTS

ACCESSORIES

WARRANTY













CG



DIMENSIONS

Height: 3.5"/8.9 cm
Width: 5"/12.7 cm
Depth: 3.875"/9.84 cm
Lamp: MR-8
Material: Brass

Smaller than the classic ML, the CG maintains a powerful light pattern while being a perfect blend of simplicity and function. The solid billet brass housing and faceplate trim are machined at tolerances exceeding 0.001".

| DESCRIPTION | CODE |
|---|---|
| FIXTURE | CG |
| LAMP | 20 (Halogen) |
| FINISHES | |
| Metals | Powder Coat |
|  |  |
| BS | NP* |
|  |  |
| WG | FW |
|  |  |
| AL | BZ |
|  |  |
| DG | WI |
|  |  |
| VF | SB |
|  |  |
| SB | FB |

EXAMPLE: CG-20-BS = CG - HALOGEN 20W LAMP - BRASS FINISH



FINISHES

LUXOR ZDC

LUXOR CONTROLLERS

ZD MR-16 LAMPS

LUXOR CUBE

POWER CONTROLLERS

INTEGRATED LED

ACCENT LIGHTS
PATH & AREA LIGHTS
WALL LIGHTS
DOWN LIGHTS
IN-GRADE/WELL/
SPECIALTY LIGHTS

STANDARD BASES

ACCENT LIGHTS
PATH & AREA LIGHTS
WALL LIGHTS
DOWN LIGHTS
IN-GRADE/WELL LIGHTS

ACCESSORIES

WARRANTY

Standard Base Down Lights

DESIGNED
TO BRIGHTEN

FX incandescent down lights provide a gentle glow that mimics natural moonlight. Install above tables, barbeques and seating to softly illuminate and highlight the area.

INTERACTIVE
TABLE OF CONTENTS

FINISHES

LUXOR ZDC

LUXOR CONTROLLERS

ZD MR-16 LAMPS

LUXOR CUBE

POWER CONTROLLERS

INTEGRATED LED

- ACCENT LIGHTS
PATH & AREA LIGHTS
WALL LIGHTS
DOWN LIGHTS
IN-GRADE/WELL/
SPECIALTY LIGHTS

STANDARD BASES

- ACCENT LIGHTS
PATH & AREA LIGHTS
WALL LIGHTS
DOWN LIGHTS
IN-GRADE/WELL LIGHTS

ACCESSORIES

WARRANTY











TS




DIMENSIONS

Length:
– TS-20/35: 5"/12.7 cm
– TS-50: 6.5"/16.51 cm
Diameter:
– TS-20/35: 2"/5.08 cm
– TS-50: 2.5"/6.35 cm
Lamp: AR-11/AR-20
Material: Copper or Aluminum Alloy

The adjustable TS functions as an outdoor track light. The TS uses the same lamp as the CL, TC, and VL, allowing a mix of fixture types to suit mounting needs, while maintaining consistent light quality.

| DESCRIPTION | CODE | | | |
|---|---|---|---|---|
| FIXTURE | TS | | | |
| LAMP | 20, 35 (Halogen AR-11), 50 (Halogen AR-20) | | | |
| FINISHES | | | | |
| Metals | | | | |
|  |  | | | |
| CU | NP* | | | |
| Powder Coat - Standard | | | | |
|  |  |  |  |  |
| BZ | DG | WI | SB | FB |
| Powder Coat - Specialty | | | | |
|  |  |  | | |
| WG | FW | AL | | |



EXAMPLE: TS-20-FW = TS - HALOGEN 20W LAMP - FLAT WHITE FINISH













TC



DIMENSIONS

Height: 3.5"/8.89 cm
Width: 2.75"/6.99 cm
Length: 2.75"/6.99 cm
Lamp: AR-11/AR-20
Material: Copper

On any architectural mounted light source, one of the primary challenges is to keep the focus on the detailed craftsmanship. The TC is designed to seamlessly incorporate into fine outdoor architectural structures.

| DESCRIPTION | CODE | | | |
|---|---|---|---|---|
| FIXTURE | TC | | | |
| LAMP | 20, 35 (Halogen AR-11) | | | |
| FINISHES | | | | |
| Metals | | | | |
|  |  | | | |
| CU | NP* | | | |
| Powder Coat - Standard | | | | |
|  |  |  |  |  |
| BZ | DG | WI | SB | FB |
| Powder Coat - Specialty | | | | |
|  |  |  | | |
| WG | FW | AL | | |

EXAMPLE: TC-35-CU = TC - HALOGEN 35W LAMP - COPPER FINISH











CL



DIMENSIONS

Height: 3.5"/8.89 cm
Diameter: 3.25"/8.26 cm
Lamp: AR-11/AR-20
Material: Copper

The CL is analogous to an interior recessed ceiling light to gently illuminate dining or seating areas. It will blend beautifully with its surroundings and complement the architectural style of any home, while providing dramatic accents.

| DESCRIPTION | CODE | | | |
|---|---|---|---|---|
| FIXTURE | CL | | | |
| LAMP | 20, 35, 50 (Halogen AR-11) | | | |
| FINISHES | | | | |
| Metals | | | | |
|  |  | | | |
| CU | NP* | | | |
| Powder Coat - Standard | | | | |
|  |  |  |  |  |
| BZ | DG | WI | SB | FB |
| Powder Coat - Specialty | | | | |
|  |  |  | | |
| WG | FW | AL | | |

EXAMPLE: CL-20-CU = CL - HALOGEN 20W LAMP - COPPER FINISH

INTERACTIVE
TABLE OF CONTENTS

FINISHES

LUXOR ZDC

LUXOR CONTROLLERS

ZD MR-16 LAMPS

LUXOR CUBE

POWER CONTROLLERS

INTEGRATED LED

- ACCENT LIGHTS
- PATH & AREA LIGHTS
- WALL LIGHTS
- DOWN LIGHTS
- IN-GRADE/WELL/
SPECIALTY LIGHTS

STANDARD BASES

- ACCENT LIGHTS
- PATH & AREA LIGHTS
- WALL LIGHTS
- DOWN LIGHTS
- IN-GRADE/WELL LIGHTS

ACCESSORIES

WARRANTY



LS



DIMENSIONS

Height: 3" to 3.75"/7.62 cm
to 9.53 cm
Diameter: 1.38"/3.51 cm
Lamp Base: SCB
Material: Copper and Brass

The LS is designed to create moments to remember. The effect is best when used in small-caliper trees and positioned from the branches above, creating a moonlight effect.

| DESCRIPTION | CODE |
|--|---|
| FIXTURE | LS |
| LAMP | 12 (Incandescent) |
| FINISHES | |
| Metals | |
|  CU |  NP* |

EXAMPLE: LS-12-CU = LS - INCANDESCENT 12W LAMP - COPPER FINISH











VL



DIMENSIONS

Height: 4.5"/11.43 cm
Diameter: 2"/5.08 cm
Lamp: AR-11
Material: Copper

The VL is compact, yet delivers a dramatic visual impact over garden sculptures, water pools, or natural elements. The VL achieves elegant lighting while never calling attention to the source.

| DESCRIPTION | CODE |
|--|---|
| FIXTURE | VL |
| LAMP | 20 (Halogen) |
| FINISHES | |
| Metals | |
|  CU |  NP* |
| Powder Coat - Standard | |
|  BZ |  DG |
|  WI |  SB |
|  FB |  WG |
|  FW |  AL |

EXAMPLE: VL-20-CU = VL - HALOGEN 20W LAMP - COPPER FINISH









MD



DIMENSIONS

Length: 9.5"/24.13 cm
Diameter: 2.6"/6.6 cm
Lamp: MR-16
Material: Aluminum Alloy

The MD is specifically designed for down light applications. A specially engineered shield cover and knuckle assembly prevent moisture intrusion.

| DESCRIPTION | CODE |
|--|--|
| FIXTURE | MD |
| LAMP | NL (No lamp), 10, 20, 35, 50 (Halogen) |
| STRAIGHT SHROUD OPTION | SS |
| FINISHES | |
| Powder Coat - Standard | |
|  BZ |  DG |
|  WI |  SB |
|  FB |  WG |
|  FW |  AL |

EXAMPLE: MD-35-SB = MD - HALOGEN 35W LAMP - SEDONA BROWN FINISH



MD-NL-BZ

FINISHES

LUXOR ZDC

LUXOR CONTROLLERS

ZD MR-16 LAMPS

LUXOR CUBE

POWER CONTROLLERS

INTEGRATED LED

- ACCENT LIGHTS
- PATH & AREA LIGHTS
- WALL LIGHTS
- DOWN LIGHTS
- IN-GRADE/WELL/
SPECIALTY LIGHTS

STANDARD BASES

- ACCENT LIGHTS
- PATH & AREA LIGHTS
- WALL LIGHTS
- DOWN LIGHTS
- IN-GRADE/WELL LIGHTS

ACCESSORIES

WARRANTY

Standard Base Well Lights

DESIGNED TO
ACCENTUATE

Bring the warmth of FX incandescent well lights into your design wherever you have a need for an unobtrusive accent fixture. Glare-free fixtures are thoughtfully designed to blend into even the smallest areas with ease.

INTERACTIVE
TABLE OF CONTENTS

FINISHES

LUXOR ZDC

LUXOR CONTROLLERS

ZD MR-16 LAMPS

LUXOR CUBE

POWER CONTROLLERS

INTEGRATED LED

- ACCENT LIGHTS
PATH & AREA LIGHTS
WALL LIGHTS
DOWN LIGHTS
IN-GRADE/WELL/
SPECIALTY LIGHTS


STANDARD BASES

- ACCENT LIGHTS
PATH & AREA LIGHTS
WALL LIGHTS
DOWN LIGHTS
IN-GRADE/WELL LIGHTS

ACCESSORIES

WARRANTY

RP



DIMENSIONS

Height: RG: 9"/22.86 cm
LV: 9.3"/23.6 cm
CW: 11"/27.9 cm
Diameter: 6.75"/17.15 cm
Lamp: MR-16
Material: Brass or Composite

FC



DIMENSIONS

Height: RG: 4.8"/12.19 cm
LV: 5.1"/13 cm
CW: 6.8"/17.3 cm
Diameter: 4"/10.16 cm
Lamp: MR-11
Material: Brass or Composite





CF



DIMENSIONS





Height: 9"/22.86 cm
Diameter: 6"/15.54 cm
Lamp: PAR36
Material: Composite

There is not a more versatile subterranean product than the RP. It can be configured to wall wash in tight spaces with a spread beam or provide a long, narrow projection of light for a tall palm... even after installation.

| DESCRIPTION | CODE | | |
|---|---|---|---|
| FIXTURE | RP | | |
| LAMP | NL (No lamp), 10, 20, 35, 50 (Halogen) | | |
| GRATES | RG (Ring), LV (Louver), CW (Cowling) | | |
| FINISHES | | | |
| Metals | Composites | | |
|  |  |  |  |
| BS | NP* | CB | DT |


EXAMPLE: RP-35-LV-BS = RP - HALOGEN 35W LAMP - LOUVER - NATURAL BRASS FINISH

The subterranean FC introduces glare-free controlled illumination into smaller scale spaces. Applications may include areas behind potted plants, or in front of the entrance columns of a stately residence.

| DESCRIPTION | CODE | | |
|---|---|---|---|
| FIXTURE | FC | | |
| LAMP | NL (No lamp), 20 (Halogen) | | |
| GRATES | RG (Ring), LV (Louver), CW (Cowling) | | |
| FINISHES | | | |
| Metals | Composites | | |
|  |  |  |  |
| BS | NP* | CB | DT |

EXAMPLE: FC-20-CW-CB = FC - HALOGEN 20W LAMP - COWLING - CAMO BRONZE FINISH

The CF was designed and engineered with all the challenges of typical well lights in mind. The end result: a forward-thinking specification-grade product that resolves safety, service, and aesthetic issues with exclusive features.

| DESCRIPTION | CODE |
|---|---|
| FIXTURE | CF |
| LAMP | NL (No lamp), 20, 35 (Halogen) |
| FINISHES | |
| Composites | |
|  |  |
| CB | DT |

EXAMPLE: CF-20-CB = CF - HALOGEN 20W LAMP - CAMO BRONZE FINISH

FINISHES

LUXOR ZDC

LUXOR CONTROLLERS

ZD MR-16 LAMPS

LUXOR CUBE

POWER CONTROLLERS

INTEGRATED LED

- ACCENT LIGHTS
- PATH & AREA LIGHTS
- WALL LIGHTS
- DOWN LIGHTS
- IN-GRADE/WELL/
SPECIALTY LIGHTS

STANDARD BASES

- ACCENT LIGHTS
- PATH & AREA LIGHTS
- WALL LIGHTS
- DOWN LIGHTS
- IN-GRADE/WELL LIGHTS

ACCESSORIES

WARRANTY

Accessories

DESIGNED TO
COMPLEMENT

FX offers an assortment of fixture accessories to enhance your design. From various spikes and riser heights to tree box mounting kits, splicing options and more, there's an accessory to make your vision a reality.

INTERACTIVE
TABLE OF CONTENTS

FINISHES

LUXOR ZDC

LUXOR CONTROLLERS

ZD MR-16 LAMPS

LUXOR CUBE

POWER CONTROLLERS

INTEGRATED LED

- ACCENT LIGHTS
PATH & AREA LIGHTS
WALL LIGHTS
DOWN LIGHTS
IN-GRADE/WELL/
SPECIALTY LIGHTS

STANDARD BASES

- ACCENT LIGHTS
PATH & AREA LIGHTS
WALL LIGHTS
DOWN LIGHTS
IN-GRADE/WELL LIGHTS

ACCESSORIES

WARRANTY



LED REPLACEMENT
KITS



LED OPTICS



BEAM ANGLE LENS



COLOR FILTERS



HEX BAFFLES



RECESSOR RINGS

ACCESSORIES AND PARTS

LED REPLACEMENT KITS

| Catalog No | Description |
|------------|----------------------------------|
| 1LEDPLKIT | 1 LED Path Light Replacement Kit |
| 1LEDULKIT | 1 LED Up Light Replacement Kit† |
| 3LEDPLKIT | 3 LED Path Light Replacement Kit |
| 3LEDULKIT | 3 LED Up Light Replacement Kit† |
| 6LEDULKIT | 6 LED Up Light Replacement Kit† |
| 9LEDULKIT | 9 LED Up Light Replacement Kit† |
| 755902 | 1 LED Board for LF* |

Includes Filters, Screws, Reflectors and LED Board

ZDC LED REPLACEMENT KITS

| Catalog No | Description |
|--------------------------------------|---|
| ZDCKITL | ZDC Replacement Kit (Large) |
| ZDC3LEDKIT-ZZ (Fixture code)-XX** | ZDC Replacement Kit (Fixture Specific) |

Fixture kit includes Board, Reflector, Diffuser, and Lens Cap with Frosted Lens

LED OPTICS KITS

| Catalog No | Description |
|--------------|-----------------------------------|
| 1LEDOPTICKIT | Optics Kit for 1 LED Board |
| 3LEDOPTICKIT | Optics Kit for 3 LED Board |
| 9LEDOPTICKIT | Optics Kit for 6 and 9 LED Boards |

ZD LED REPLACEMENT KITS

| Catalog No | Description |
|-------------|-------------------------------------|
| ZD1LEDPLKIT | ZD 1 LED Path Light Replacement Kit |
| ZD1LEDULKIT | ZD 1 LED Up Light Replacement Kit† |
| ZD3LEDPLKIT | ZD 3 LED Path Light Replacement Kit |
| ZD3LEDULKIT | ZD 3 LED Up Light Replacement Kit† |
| ZD6LEDULKIT | ZD 6 LED Up Light Replacement Kit† |
| ZD9LEDULKIT | ZD 9 LED Up Light Replacement Kit† |
| 755901 | ZD 1 LED Board for LF* |

Includes Filters, Screws, Reflectors and LED Board

LED BEAM ANGLE LENSES

| Catalog No | Description |
|------------|--------------------------------------|
| 1LEDFLENS | 1 LED Flood Lens, 30°-32° |
| 1LEDWFLENS | 1 LED Wide Flood Lens, 56°-58° |
| 3LEDFLENS | 3 LED Flood Lens, 30°-32° |
| 3LEDWFLENS | 3 LED Wide Flood Lens, 56°-58° |
| 9LEDFLENS | 6 and 9 LED Flood Lens, 30°-32° |
| 9LEDWFLENS | 6 and 9 LED Wide Flood Lens, 56°-58° |

COLOR FILTERS

| Catalog No | Description |
|--------------|---------------------------------------|
| 250015180000 | Color Filter for MR-16 Light Green |
| 250015190000 | Color Filter for MR-16 Light Blue |
| 250015230000 | Color Filter for MR-16 Dichroic Peach |
| 250015200000 | Color Filter for MR-16 Dichroic Blue |
| 250015210000 | Color Filter for MR-16 Dichroic Green |
| 250015220000 | Color Filter for MR-16 Dichroic Red |
| 250010140000 | Color Filter for MR-11 Dichroic Peach |
| 250010160000 | Color Filter for MR-11 Dichroic Blue |
| 250015170000 | Frosted Lens for MR-16 |
| 250010480000 | Frosted Lens for MR-11 |
| 250015240000 | Solite Spread for MR-16 |
| 250015420000 | Solite Spread for MR-11 |
| 250013550000 | Spread Lens for MR-16 |
| 250015160000 | Spread Lens for CG |
| 250015260000 | Hex Baffle for MR-16 |
| 250015250000 | Hex Baffle for MR-11 |
| RRMR16 | Recessor Ring for MR-16 |

†Can be used in down lights *Board Only

*May require longer lead time ** Denotes powder coat finish

INTERACTIVE
TABLE OF CONTENTS

FINISHES

LUXOR ZDC

LUXOR CONTROLLERS

ZD MR-16 LAMPS

LUXOR CUBE

POWER CONTROLLERS

INTEGRATED LED

- ACCENT LIGHTS
PATH & AREA LIGHTS
WALL LIGHTS
DOWN LIGHTS
IN-GRADE/WELL/
SPECIALTY LIGHTS

STANDARD BASES

- ACCENT LIGHTS
PATH & AREA LIGHTS
WALL LIGHTS
DOWN LIGHTS
IN-GRADE/WELL LIGHTS

ACCESSORIES

WARRANTY



POST MOUNT



VERSA BOX



MINI J-BOX



TREEBOX



SPIKES



WALL MOUNTS



ROOF MOUNTS

| MOUNTING OPTIONS | |
|------------------|-------------------|
| Catalog No | Description |
| Post Mount | |
| PM-BS | Post Mount |
| PM-NP* | Post Mount |
| PM-XX** | Post Mount |
| PDM-BS | Deck Mount for PM |
| PDM-NP* | Deck Mount for PM |
| PDM-XX** | Deck Mount for PM |

| | |
|-------------|----------------------------|
| Versa Box | |
| VB-050-BS | VersaBox for ½" Thread |
| VB-050-NP* | VersaBox for ½" Thread |
| VB-050-AB* | VersaBox for ½" Thread |
| VB-050-AT* | VersaBox for ½" Thread |
| VB-050-XX** | VersaBox for ½" Thread |
| VB-TS-BS | VersaBox for TS down light |
| VB-TS-XX** | VersaBox for TS down light |
| VB-TS-NP* | VersaBox for TS down light |

| | |
|-------------|-------------------------------|
| Mini J-Box | |
| MJ-050-XX** | Mini J-box for ½" Thread |
| MJ-TS-XX** | Mini J-box for TS down lights |
| MJ-TS-CU | Mini J-box for TS down lights |
| MJ-TS-NP* | Mini J-box for TS down lights |

| | |
|--------------|--|
| Gutter Mount | |
| GM-SS | Gutter Mount for ½" Thread Accent Lights |

| MOUNTING OPTIONS | |
|------------------|------------------------|
| Catalog No | Description |
| TreeBox Mount | |
| TB-XX** | TreeBox with ½" thread |
| Spikes | |
| 753900 | Super Slot Spike |
| 250015840000 | Long Slot Spike |
| 250011560000 | CDS Spike |
| 250020020000 | 3-Prong Spike |
| SJ-BS | Super J-Box |
| SJ-NP* | Super J-Box |
| SJ-XX** | Super J-Box |

| | |
|--------------|----------------------------------|
| Wall Mounts | |
| POBRKT | PO Mounting Bracket |
| MOBRKT | MO Mounting Bracket |
| WM-XX** | Wall mount with aluminum knuckle |
| WP-1G-050-XX | Wall Plate, 1-Gang, ½" Thread |
| WP-RD-050-XX | Wall Plate, Round, ½" Thread |

[†]Can be used in down lights ^{*}Board Only
^{*}May require longer lead time
^{**}Denotes powder coat finish



SPLICING

| SPLICING OPTIONS | |
|------------------|--|
| Catalog No | Description |
| DBRY100 | 100 tubes loose in box, plus inner box with 100 wire nuts (100 bulk) |
| DBRY2X25 | Two tubes and wire nuts in a plastic bag (2 pack of 25 units) |

→ INTERACTIVE
TABLE OF CONTENTS

FINISHES

LUXOR ZDC

LUXOR CONTROLLERS

ZD MR-16 LAMPS

LUXOR CUBE

POWER CONTROLLERS

INTEGRATED LED

ACCENT LIGHTS

PATH & AREA LIGHTS

WALL LIGHTS

DOWN LIGHTS

IN-GRADE/WELL/
SPECIALTY LIGHTS

STANDARD BASES

ACCENT LIGHTS

PATH & AREA LIGHTS

WALL LIGHTS

DOWN LIGHTS

IN-GRADE/WELL LIGHTS

ACCESSORIES

WARRANTY



➔ INTERACTIVE
TABLE OF CONTENTS

FINISHES

LUXOR ZDC

LUXOR CONTROLLERS

ZD MR-16 LAMPS

LUXOR CUBE

POWER CONTROLLERS

INTEGRATED LED

- ACCENT LIGHTS
PATH & AREA LIGHTS
WALL LIGHTS
DOWN LIGHTS
IN-GRADE/WELL/
SPECIALTY LIGHTS

STANDARD BASES

- ACCENT LIGHTS
PATH & AREA LIGHTS
WALL LIGHTS
DOWN LIGHTS
IN-GRADE/WELL LIGHTS

ACCESSORIES

WARRANTY



ALUMINUM & COPPER
RISERS



ALUMINUM RISER
WITH COUPLER

RISER HEIGHT OPTIONS

| Catalog No | Description |
|---------------|---------------------------------------|
| 6R-XX** | 6" Aluminum Riser |
| 8R-XX** | 8" Aluminum Riser |
| 12R-XX** | 12" Aluminum Riser |
| 18R-XX** | 18" Aluminum Riser |
| 6R-COUP-XX** | 6" Aluminum Riser w/Coupler |
| 8R-COUP-XX** | 8" Aluminum Riser w/Coupler |
| 12R-COUP-XX** | 12" Aluminum Riser w/Coupler |
| 18R-COUP-XX** | 18" Aluminum Riser w/Coupler |
| 24R-COUP-XX** | 24" Aluminum Riser w/Coupler |
| 6R-90-XX** | 6" Aluminum Riser w/90° Coupler |
| 8R-90-XX** | 8" Aluminum Riser w/90° Coupler |
| 12R-90-XX** | 12" Aluminum Riser w/90° Coupler |
| 18R-90-XX** | 18" Aluminum Riser w/90° Coupler |
| 24R-90-XX** | 24" Aluminum Riser w/90° Coupler |
| 6R-T-XX** | 6" Aluminum Riser w/ 0.5" T-mount |
| 8R-T-XX** | 8" Aluminum Riser w/ 0.5" T-mount |
| 12R-T-XX** | 12" Aluminum Riser w/ 0.5" T-mount |
| 18R-T-XX** | 18" Aluminum Riser w/ 0.5" T-mount |
| 24R-T-XX** | 24" Aluminum Riser w/ 0.5" T-mount |
| 8R-GT-CU | 8" Copper Riser ½" NPT brass threads |
| 8R-GT-XX** | 8" Copper Riser ½" NPT brass threads |
| 8R-GT-AB* | 8" Copper Riser ½" NPT brass threads |
| 8R-GT-AT* | 8" Copper Riser ½" NPT brass threads |
| 8R-GT-NP* | 8" Copper Riser ½" NPT brass threads |
| 12R-GT-CU | 12" Copper Riser ½" NPT brass threads |
| 12R-GT-XX** | 12" Copper Riser ½" NPT brass threads |
| 12R-GT-AB* | 12" Copper Riser ½" NPT brass threads |
| 12R-GT-AT* | 12" Copper Riser ½" NPT brass threads |
| 12R-GT-NP* | 12" Copper Riser ½" NPT brass threads |



VARIABLE HEIGHT
RISER



FITTINGS



SIGN LIGHT RISER
WITH RECTANGULAR OR
ROUND MOUNT

RISER HEIGHT OPTIONS (CONT)

| Catalog No | Description |
|---------------|---|
| 18R-GT-CU | 18" Copper Riser ½" NPT brass threads |
| 18R-GT-XX** | 18" Copper Riser ½" NPT brass threads |
| 18R-GT-AB* | 18" Copper Riser ½" NPT brass threads |
| 18R-GT-AT* | 18" Copper Riser ½" NPT brass threads |
| 18R-GT-NP* | 18" Copper Riser ½" NPT brass threads |
| 24R-GT-CU | 24" Copper Riser ½" NPT brass threads |
| 24R-GT-XX** | 24" Copper Riser ½" NPT brass threads |
| 24R-GT-AB* | 24" Copper Riser ½" NPT brass threads |
| 24R-GT-AT* | 24" Copper Riser ½" NPT brass threads |
| 24R-GT-NP* | 24" Copper Riser ½" NPT brass threads |
| VHRUL | Variable Height Riser for Up Light, Extends 0"-7" |
| COUP-XX** | Straight Coupling, 1/2" |
| ELBW-050-XX** | 90° Elbow Fitting, 1/2" |
| TMNT-050-XX** | T-mount Fitting, 1/2" |

SIGN LIGHT RISERS

| | |
|----------------|------------------------|
| WP-RD-050-XX** | Round Wall Plate |
| WP-1G-050-XX** | Rectangular Wall Plate |
| 24R-SL-XX** | 24" Riser |
| 36R-SL-XX** | 36" Riser |
| 48R-SL-XX** | 48" Riser |

→ INTERACTIVE
TABLE OF CONTENTS

FINISHES

LUXOR ZDC

LUXOR CONTROLLERS

ZD MR-16 LAMPS

LUXOR CUBE

POWER CONTROLLERS

INTEGRATED LED

- ACCENT LIGHTS
- PATH & AREA LIGHTS
- WALL LIGHTS
- DOWN LIGHTS
- IN-GRADE/WELL/
SPECIALTY LIGHTS

STANDARD BASES

- ACCENT LIGHTS
- PATH & AREA LIGHTS
- WALL LIGHTS
- DOWN LIGHTS
- IN-GRADE/WELL LIGHTS

ACCESSORIES

WARRANTY



MR-16



MR-11



MR-8



INCANDESCENT

LAMP REPLACEMENTS

| Catalog No | Description |
|--------------|--------------------------|
| 250010220001 | MR-16 10w 32deg 1.2K Hrs |
| 250010220002 | MR-16 20w 12deg 5K Hrs |
| 250010220004 | MR-16 20w 24deg 10K Hrs |
| 250010220005 | MR-16 20w 36deg 5K Hrs |
| 250010220006 | MR-16 20w 36deg 10K Hrs |
| 250010220007 | MR-16 20w 36deg 12K Hrs |
| 250010220008 | MR-16 20w 60deg 5K Hrs |
| 250010220009 | MR-16 35w 12deg 5K Hrs |
| 250010220010 | MR-16 35w 24deg 5K Hrs |
| 250010220011 | MR-16 35w 24deg 10K Hrs |
| 250010220012 | MR-16 35w 36deg 5K Hrs |
| 250010220013 | MR-16 35w 36deg 10K Hrs |
| 250010220014 | MR-16 35w 36deg 18K Hrs |
| 250010220015 | MR-16 35w 60deg 5K Hrs |
| 250010220016 | MR-16 50w 12deg 5K Hrs |
| 250010220017 | MR-16 50w 12deg 10K Hrs |
| 250010220018 | MR-16 50w 25deg 5K Hrs |
| 250010220019 | MR-16 50w 24deg 10K Hrs |
| 250010220020 | MR-16 50w 36deg 5K Hrs |
| 250010220021 | MR-16 50w 36deg 10K Hrs |
| 250010220022 | MR-16 50w 36deg 18K Hrs |
| 250010220023 | MR-16 50w 60deg 5K Hrs |
| 250010450000 | MR-11 12w 10deg 2K Hrs |
| 250010450001 | MR-11 20w 10deg 2K Hrs |
| 250010450002 | MR-11 20w 36deg 2K Hrs |

LAMP REPLACEMENTS (CONT)

| Catalog No | Description |
|--------------|--------------------------------|
| 250010450003 | MR-11 35w 12deg 2K Hrs |
| 250010450004 | MR-11 35w 30deg 2K Hrs |
| 250010490000 | MR8 20w 10deg 2K Hrs |
| 250010490001 | MR8 20wF 39deg 2K Hrs |
| 250010240000 | AR-11 20w 6deg 2K Hrs |
| 250010240001 | AR-11 20wF 18deg 2K Hrs |
| 250010240002 | AR-11 20wF 32deg 2K Hrs |
| 250010240003 | AR-11 35w 10deg 2K Hrs |
| 250010240004 | AR-11 35w 30deg 2K Hrs |
| 250010240005 | AR-20 50w 10deg 2K Hrs |
| 250010240006 | AR-20 50wF 25deg 2K Hrs |
| 250010500000 | PAR36 Halogen 20w 30deg 4K Hrs |
| 250010500001 | PAR36 Halogen 35w 30deg 4K Hrs |
| 250010250000 | Mini Bi-Pin Halogen 10w 2K Hrs |
| 250010250001 | Mini Bi-Pin Halogen 20w 2K Hrs |
| 250010250002 | Mini Bi-Pin Halogen 35w 2K Hrs |
| 250010250003 | Mini Bi-Pin Halogen 5w 2K Hrs |
| 250010260001 | Bi-Pin Xenon 10w 10K Hrs |
| 250010260002 | Bi-Pin Xenon 15w 10K Hrs |
| 250010260003 | Bi-Pin Xenon 20w 5K Hrs |
| 250010510000 | S-8 Incan 12wF 700 Hrs 93F |
| 250010510001 | S-8 Incan 18wF 1K Hrs 1141F |
| 250010510002 | S-8 Incan 25w 1.2K Hrs 1156 |
| 250010510003 | S-8 Incan 25wF 1.2K Hrs 1156F |



FINISHES

LUXOR ZDC

LUXOR CONTROLLERS

ZD MR-16 LAMPS

LUXOR CUBE

POWER CONTROLLERS

INTEGRATED LED

- ACCENT LIGHTS
- PATH & AREA LIGHTS
- WALL LIGHTS
- DOWN LIGHTS
- IN-GRADE/WELL/
SPECIALTY LIGHTS

STANDARD BASES

- ACCENT LIGHTS
- PATH & AREA LIGHTS
- WALL LIGHTS
- DOWN LIGHTS
- IN-GRADE/WELL LIGHTS

ACCESSORIES

WARRANTY

STATEMENT OF WARRANTY

Hunter Industries Incorporated (“Hunter”) warrants FX Luminaire (“FX”) Transformers to be free of defects in materials or workmanship under normal use for a period of ten (10) years from the original date of installation. Hunter warrants FX Low Voltage Lighting Fixtures to be free of defects in materials or workmanship under normal use for a period of three (3) years from the original date of installation. Hunter extends the warranty on FX Fixtures to ten (10) years from the original date of installation when both FX Fixtures and Transformers are installed on the same project exclusive of any competitor’s product. Hunter warrants FX LED Fixtures to be free of defects in materials or workmanship under normal use for a period of ten (10) years from the original date of installation. LED MR-16 lamps and Luxor Cubes are warranted for five (5) years. If a defect in a FX product is discovered during the applicable warranty period, Hunter will repair or replace the product or the defective part, at its discretion. This warranty does not extend to repairs, adjustments, or replacement of a FX product or part that results from misuse, negligence, alteration, modification, tampering, or improper installation and/or maintenance of the product. This warranty extends only to the original installer of the FX product. If a defect arises in a FX product or part during the warranty period, you should contact your local FX Authorized Distributor.

FX’S OBLIGATION TO REPAIR OR REPLACE ITS PRODUCTS AS SET FORTH ABOVE IS THE SOLE AND EXCLUSIVE WARRANTY SET FORTH BY FX. THERE ARE NO OTHER WARRANTIES, EXPRESSED OR IMPLIED, INCLUDING WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. FX WILL NOT BE LIABLE TO DISTRIBUTOR OR ANY OTHER PARTY IN STRICT LIABILITY, TORT, CONTRACT, OR ANY OTHER MANNER FOR DAMAGES CAUSED OR CLAIMED TO BE CAUSED AS A RESULT OF ANY DESIGN OR DEFECT IN FX’S PRODUCTS, OR FOR ANY SPECIAL, INCIDENTAL, CONSEQUENTIAL, OR EXEMPLARY DAMAGES OF ANY NATURE, INCLUDING WITHOUT LIMITATION LOST BUSINESS OR PROFITS. NOTWITHSTANDING THE FOREGOING, IF FOR ANY REASON FX IS FOUND TO BE LIABLE IN NO EVENT SHALL FX’S LIABILITY EXCEED THE PRICE OF THE PRODUCT WHICH GIVES RISE TO THE CLAIM, LOSS, OR DAMAGE.

Any FX product being returned must receive a Return Goods Authorization number from Hunter Customer Service prior to sending product back. All returned product is subject to a 25% restocking fee. Product must be returned within six (6) months of order date. All product returned must be in its original packaging, be undamaged and unused and never energized. Product not meeting these criteria will be returned to original sender. Products with specialty powder coat finishes are not returnable. Specialty powder coat finishes include (but are not limited to): Almond (AL), Verde Speckle (VF), Silver (SV), Flat White (FW), and White Gloss (WG). Hunter Industries is not responsible for product loss or damage during return transit to RMA location.

If you have any questions concerning the warranty or its application, please write to:

Customer Service Department
FX Luminaire
1940 Diamond Street
San Marcos, CA 92078, U.S.A.

➔ INTERACTIVE
TABLE OF CONTENTS

FINISHES

LUXOR ZDC

LUXOR CONTROLLERS

ZD MR-16 LAMPS

LUXOR CUBE

POWER CONTROLLERS

INTEGRATED LED

- ACCENT LIGHTS
- PATH & AREA LIGHTS
- WALL LIGHTS
- DOWN LIGHTS
- IN-GRADE/WELL/
SPECIALTY LIGHTS

STANDARD BASES

- ACCENT LIGHTS
- PATH & AREA LIGHTS
- WALL LIGHTS
- DOWN LIGHTS
- IN-GRADE/WELL LIGHTS

ACCESSORIES

WARRANTY



FXLuminaire.

A Hunter Industries Company

Our mission is to create the most energy efficient lighting products in the world while maintaining the highest level of quality and reliability. In every instance we will back our innovations with the unwavering support our customers need to succeed.



Gregory R. Hunter, President of Hunter Industries

Website fxl.com | Customer Support 760-744-5240 | Technical Service 760-591-7383

This brochure was printed on Forest Stewardship Council® (FSC) certified paper with soy inks. The FSC is an international organization established to promote the responsible management of the world's forests.

© 2015 Hunter Industries Incorporated

FXLIT-183 B 1/16